


SRFS TELEINFRA

Get connected with us:



1.0mm Male to Female Fixed attenuator, DC-110GHz,20dB,1W

Model no.: SRFS-AT-1.0MF-20-1

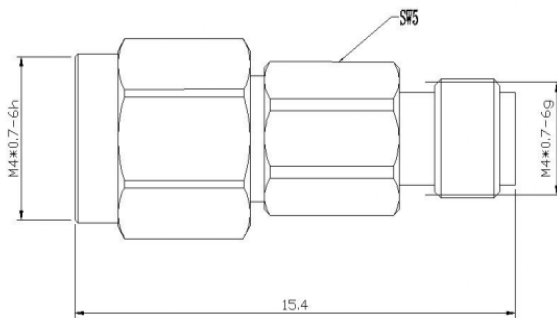

Electrical Specifications	
Impedance	50 ohm
Frequency Range	DC-110 GHz
VSWR	1.6 max
Input Avg Power	1W@ 25°C
Peak Power	5W
Direction	Bidirectional, 1.0mm female to 1.0mm male
Attenuation(dB)	20
Accuracy(dB)	-1.0/+2.0
Mechanical Specifications	
Connector Body	Passivated stainless steel
Insulators	PEI
Center Contact	Gold plated beryllium copper/brass
Operating Temperature	-55°Cto100°C
Storage Temperature	-55°Cto125°C
RoHS	Compliant

Add: plot no 10 shiv Vihar a block Najafgarh Sahibi river road Vikas Nagar Uttam Nagar new delhi-110059

+91-9027232570, +91-8800726650, +91 8076749052 info@srfsteleinfra.in, info@srfsteleinfra.com, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023






1.0mm Male to Female Fixed attenuator, DC-110GHz,20dB,1W

Model no.: SRFS-AT-1.0MF-20-1

Test Result:

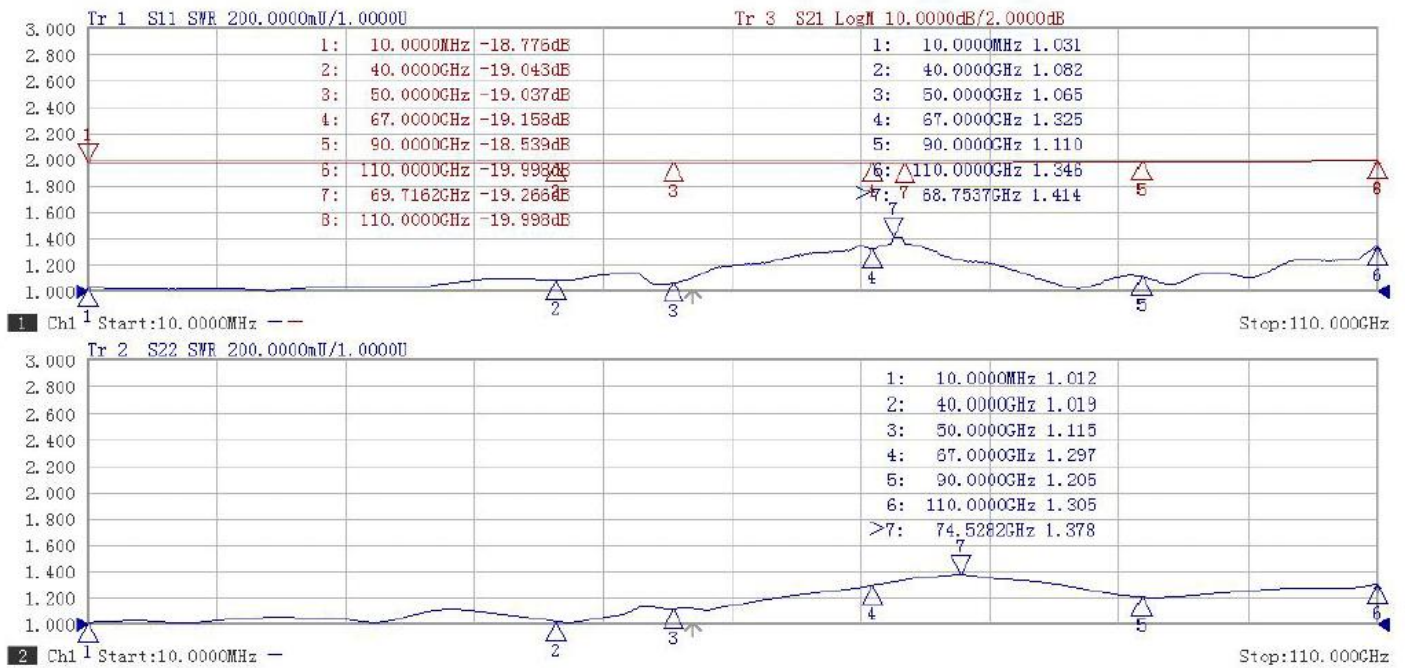

Add: plot no 10 shiv Vihar a block Najafgarh Sahibi river road Vikas Nagar Uttam Nagar new delhi-110059

+91-9027232570, +91-8800726650, +91 8076749052 info@srfsteleinfra.in, info@srfsteleinfra.com, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

