


## 2.4mm Female to 3.5mm Female Adapter

### Drawing(mm)

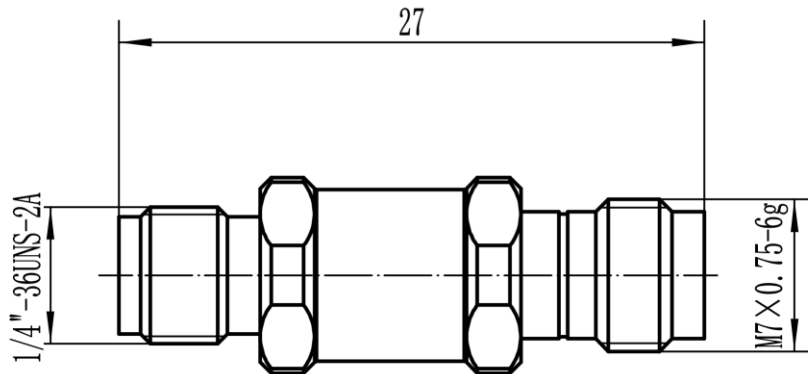

### Electrical & Environmental

Impedance	50 ohm
Frequency Range	34 GHz
VSWR	1.15(DC-27GHz), 1.2(DC-34GHz)
Operating Temp	-55°C to +165°C
Interface	3.5mm per IEC 60169, 2.4mm per IEC 61169

### Material

Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper
Insulator	PEI

### Typical Test Data

