

# SRFS TELEINFRA


## Inner DC Block

Get connected with us:



Electrical & Mechanical Specifications	
Impedance	50 ohm
VSWR	1.35 max
Insertion Loss	0.6dB max
Voltage Rating	60 Volts max
Input Avg Power	2 Watts max @25°C (Derate linearly to 0.2 Watt at
Operating Temp	-55°C to 100°C
RoHS	Compliant
Connector	2.4mm
Connector Body	Passivated Stainless Steel
Center Contact	1.27um Gold plated beryllium copper
Net Weight	About 3.5g

### Dimensions(mm)

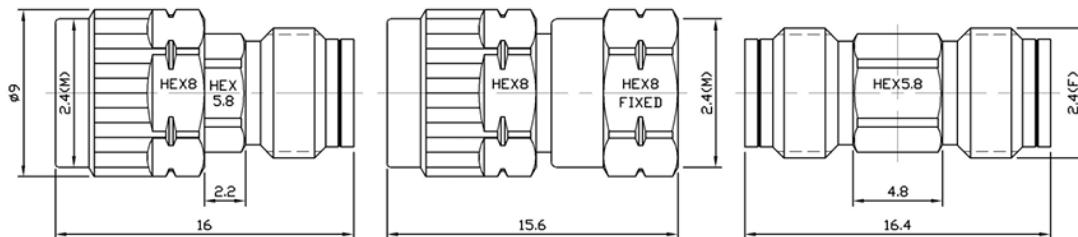

**A: male to female**

**B: male to male**

**C: female to female**

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91 84354 74330 info@srfsteleinfra.in, aayush@srfsteleinfra.in

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.  
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.  
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.  
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

