


## 2.4mm Male to SSMP Male Detent Adapter

### Drawing(mm)

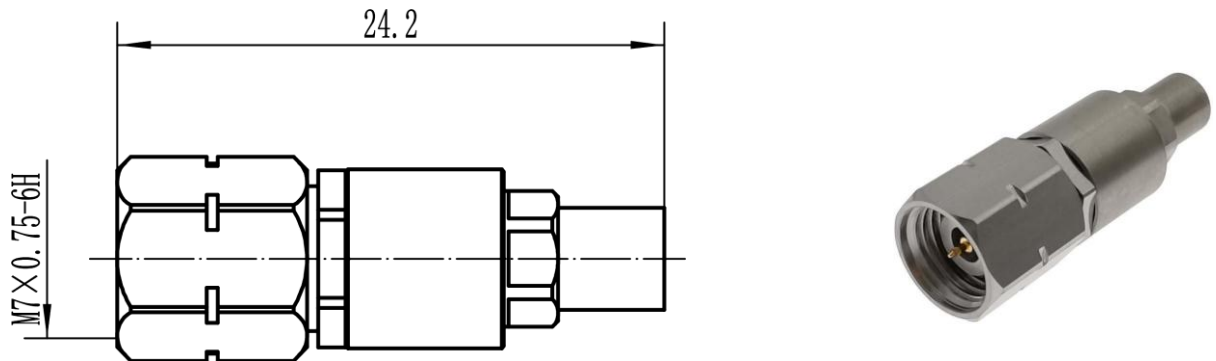

### Electrical & Environmental

Impedance	50 ohm
Frequency Range	40 GHz
VSWR	1.3 max
Operating Temp	-55°C to +165°C
Interface	2.4mm per IEC 61169, SSMP per MIL-STD-348

### Material

Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper
Insulator	PEI

### Typical Test Data

