


## Drawing(mm)

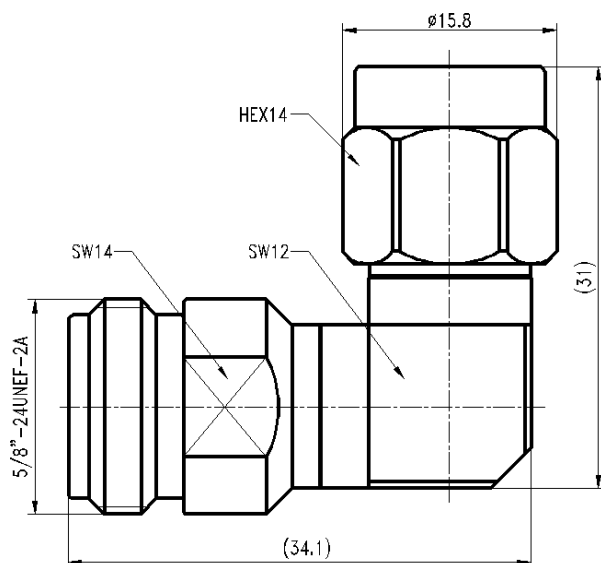

## Electrical & Environmental

|                 |                        |
|-----------------|------------------------|
| Impedance       | 50 ohm                 |
| Frequency Range | DC-18 GHz              |
| VSWR            | 1.25 max               |
| Operating Temp  | -55°C to +165°C        |
| Interface       | N&TNCA per MIL-STD-348 |

## Material

|                |                                                  |
|----------------|--------------------------------------------------|
| Connector Body | Passivated stainless steel                       |
| Center Contact | Gold plated beryllium copper / Gold plated brass |
| Insulator      | PEI & PTFE                                       |

## Typical Test Data

