


SRFS TELEINFRA

Get connected with us:



SMA Double Male(plug) RF Coaxial Adaptor

Model No.- SRFS-SMAMM-27

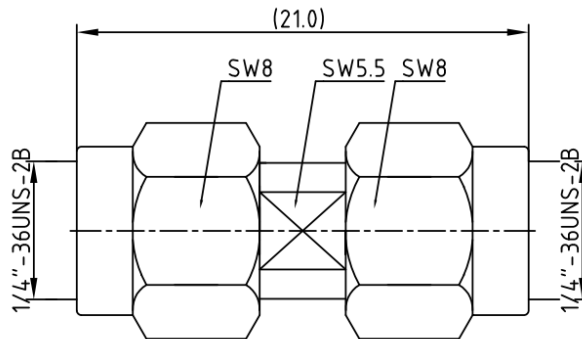

Electrical, Mechanical & Environmental Specification		
Frequency range	DC-27GHz	
Characteristic impedance	50Ω	
Center Contact Resistance	≤3MΩ	
Outer Contact Resistance	≤2MΩ	
Insulation Resistance	≥5000mΩ	
VSWR	1.20:1	
Durability (matings)	>500	
Temperature range	-55°C to 165°C	
RoHS Compliant	Yes	
Material & Plating		
Connector parts	Material	Plating
Pin Contact	Beryllium Copper	Gold Plated
Body	Stainless Steel (SU303)	Passivated
Insulators	PEI	

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91-902732570, +91-8800726650, +91 8076749052 info@srfsteleinfra.in, info@srfsteleinfra.com, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change. Unless otherwise stated, all specifications are nominal. SRFS reserves the right to make such changes as required. It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements. See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

