


SRFS TELEINFRA

Get connected with us:



SMA Female to Female to Male RF Adaptor

Model No.- SRFS-SMAFFM-3

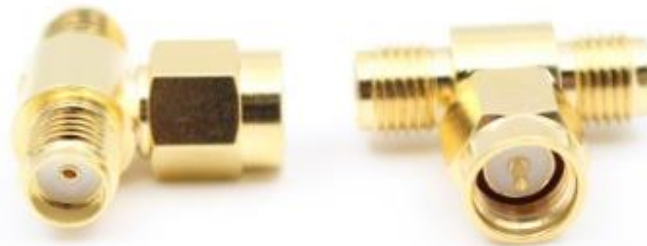

Electrical, Mechanical & Environmental Specification		
Impedance	50Ω	
Frequency range	DC-3GHz	
Dielectric withstanding voltage	1000V (volts RMS)	
Insulation resistance	≥5000MΩ	
Center contact resistance	≤3mΩ	
Outer contact resistance	≤2mΩ	
VSWR	1.25:1	
Temperature range	-45°C ~ 85°C	
Material & Plating		
Connector parts	Material	Plating
Body	Brass	Gold
Contact Pin	Beryllium-copper	Gold
Coupling nut	Brass	Gold
Insulators	Teflon	

Add: plot no 10 shiv vihar a block Najafgarh Sahibi river road Vikasnagar Uttam nagar new delhi-110059

+91-902732570, +91-8800726650,+91 8076749052 info@srfsteleinfra.in, info@srfsteleinfra.com, srfsteleinfra@gmail.com

www.srfsteleinfra.in, www.srfsteleinfra.com

SRFS Teleinfra | All specifications are subject to change.
SRFS reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.
It may be necessary to make modifications to the part and/or the documentation of the part to implement improvements.
See www.srfsteleinfra.in for the most current information. Revised: 19 Jan 2023

