

# Coaxial RF Termination

DC-40 GHz, 2.92mm Male, 50 Watts



## Electrical

<b>Impedance</b>	50 ohm
<b>Frequency Range</b>	DC-40 GHz
<b>VSWR</b>	1.35 max
<b>Input Avg Power</b>	50W@25°C ambient, derating linearly to 5W at 100°C
<b>Peak Power</b>	200W (5 micro-sec pulse width, 10% duty cycle)


## Mechanical

<b>Connector Body</b>	Passivated stainless steel
<b>Center Contact</b>	1.27um gold plated BeCu
<b>Heat Sink</b>	Black anodized aluminum

## Environmental

<b>Operating Temp</b>	-55°C to 100°C
<b>Storage Temp</b>	-55°C to 125°C
<b>RoHS</b>	Compliant

## Dimensions(mm)

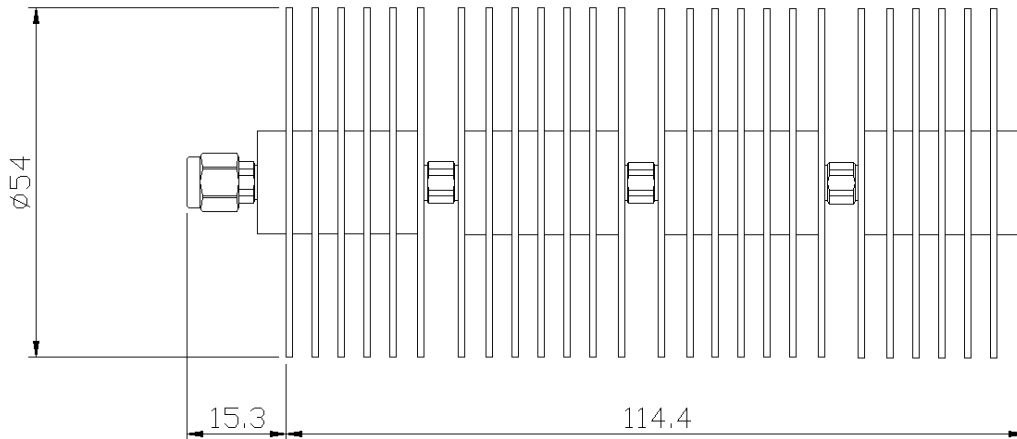

## Typical Test Data

