

Coaxial RF Termination

TRF3302351C



DC-33 GHz, 3.5mm Female, 2 Watts, with Stainless Steel Chain

Electrical

Impedance	50 ohm
Frequency Range	DC-33 GHz
VSWR	1.15 max
Input Avg Power	2W@25°C ambient, derating linearly to 0.5W at 100°C
Peak Power	200W (5 micro-sec pulse width, 1% duty cycle)


Mechanical

Connector Body	Passivated stainless steel
Center Contact	1.27um gold plated BeCu
Net Weight	Approx 7g

Environmental

Operating Temp	-55°C to 100°C
Storage Temp	-55°C to 125°C
RoHS	Compliant

Dimensions(mm)

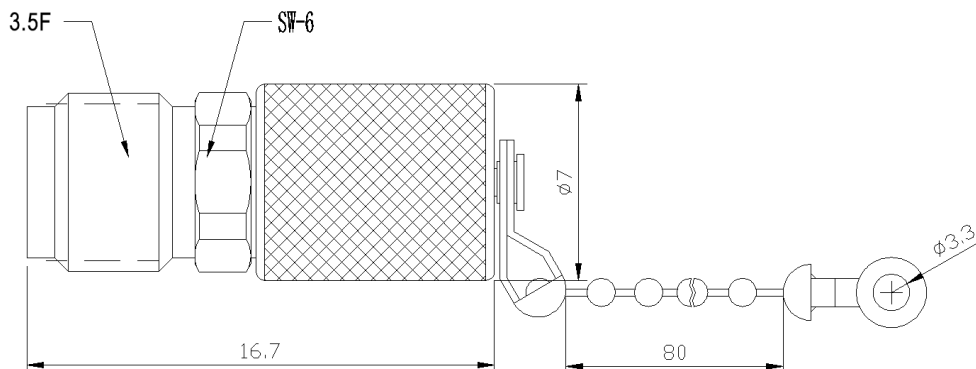

Typical Test Data

