

Coaxial Fixed Attenuator

SRFS-ATB06XXSC5



DC-6 GHz, 1-60 dB, 5 Watts, SMA, Bidirectional

Electrical

Impedance	50 ohm				
Frequency Range	DC-6 GHz				
VSWR	1.15 max				
Input Avg Power	5W@ 25°C ambient, derating linearly to 0.5W at 100°C				
Peak Power	500W (5 micro-sec pulse width, 0.5% duty cycle)				
Direction	Bidirectional, SMA female to SMA male (other configurations available) DC-6GHz,1-60dB,5Watts,SMA				
Attenuation(dB)	1-10	20	30	40	50, 60
Accuracy(dB)	±0.5	±0.5	±0.6	±0.8	±0.9


Mechanical

Connector Body	Passivated stainless steel
Heat Sink	Black anodized aluminum
Center Contact	Gold plated beryllium copper/brass
Net Weight	Approx 10 g

Environmental

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 125°C
RoHS	Compliant
Temperature Coefficient	<0.0004 dB/dB/°C

Dimensions(mm)

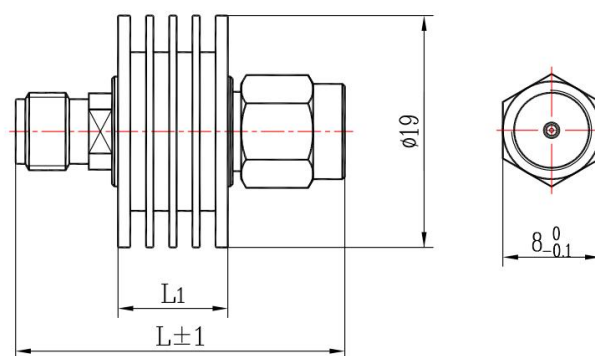

1-20dB: $L_1=9$, $L=27$

30-60dB: $L_1=12$, $L=30$