

Coaxial RF Termination

SRFS-T0410D2

DC-4 GHz, DIN 7/16 Male, 10 Watts



Electrical

Impedance	50 ohm
Frequency Range	DC-4 GHz
VSWR	1.2 max
Input Avg Power	10W@ 25°C ambient, derating linearly to 1W at 100°C
Peak Power	1kW (5 micro-sec pulse width, 1% duty cycle)

Mechanical



Connector Body	Ternary alloy plated brass
Center Contact	Gold plated brass
Heat Sink	Black anodized aluminum

Environmental

Operating Temp	-55°C to 100°C
Storage Temp	-55°C to 125°C
RoHS	Compliant

Dimensions(mm)

Net Weight(150g)

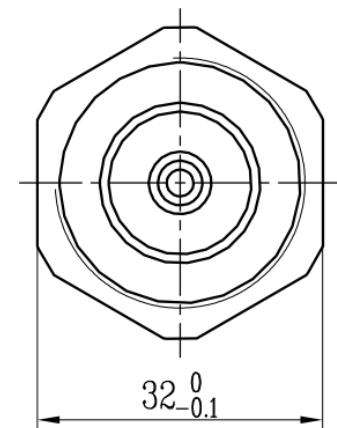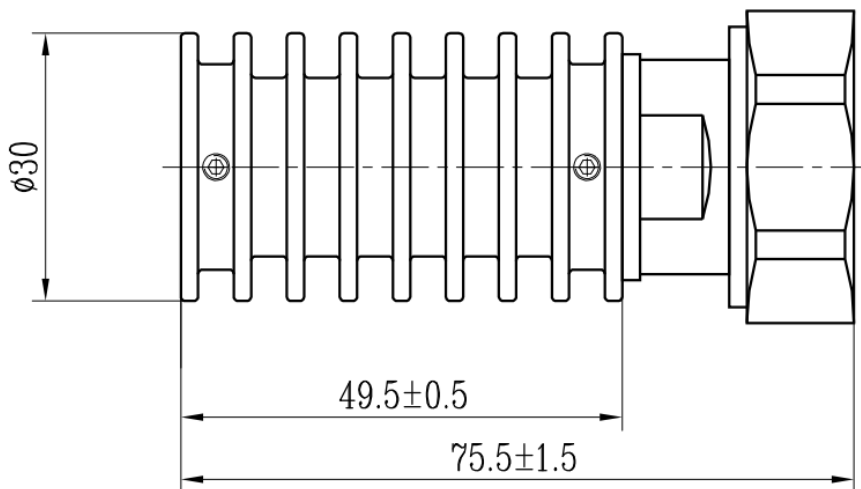

Notes

1. Customized outlines and optimal VSWR available.