Coaxial RF Termination SRFST041500D2

DC-4 GHz, DIN 7/16 Male, 1500 Watts, Fan-cooled

Electrical

Impedance	50 ohm
Frequency Range	DC-4 GHz
VSWR	1.35 max
Input Avg Power	1500W@ 25℃ ambient, derating linearly to 150W at 100℃
Peak Power	5kW (5 micro-sec pulse width, 10% duty cycle)

Mechanical

Connector Body	Brass
Center Contact	Gold plated brass
Heat Sink	Black anodized aluminum
Net Weight	Approx 38kg

Environmental

Operating Temp	-55℃ to 100℃
Storage Temp	-55℃ to 125℃
RoHS	Compliant

Dimensions(mm)

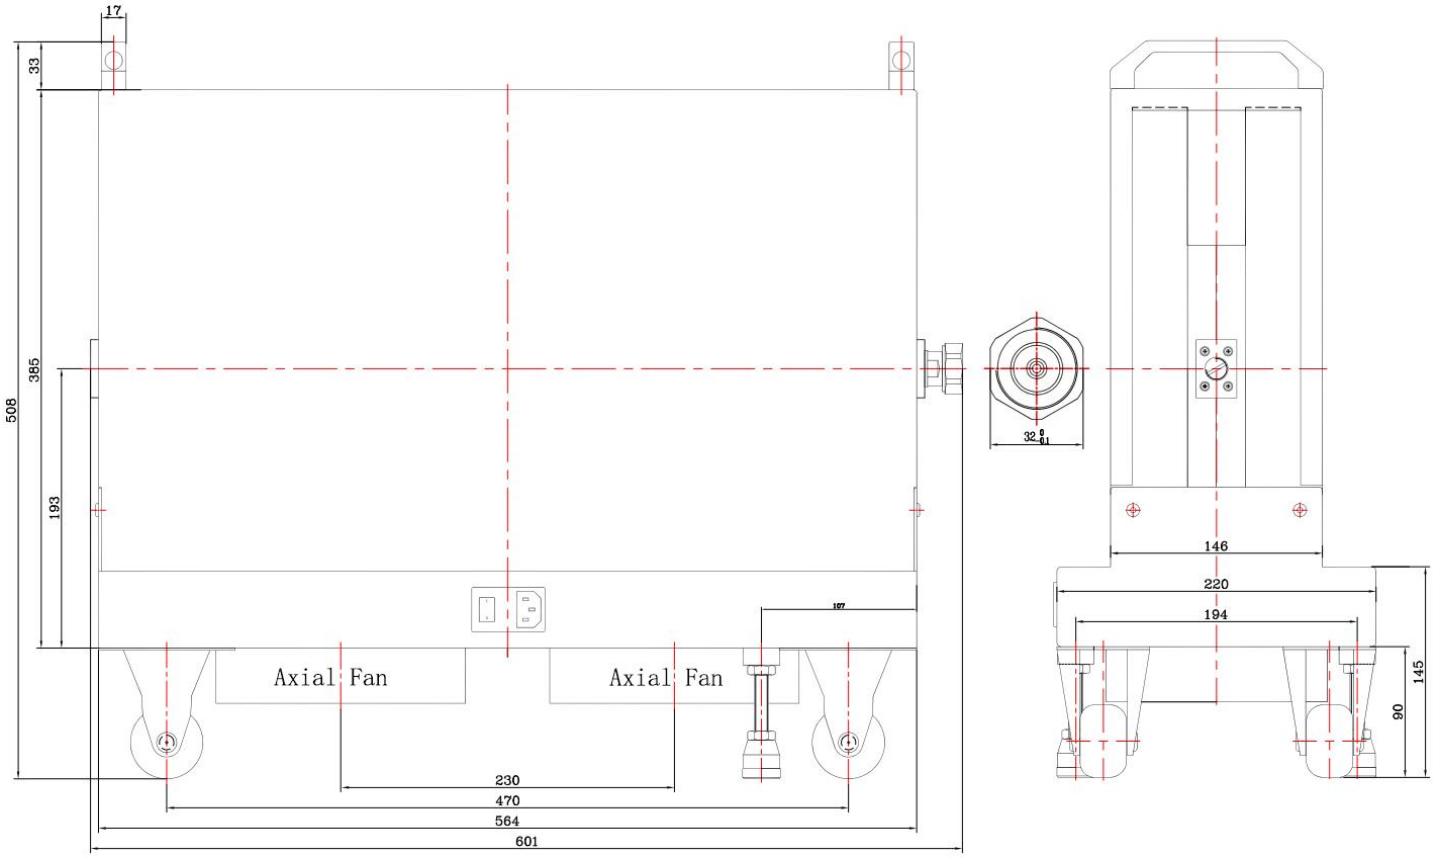

Notes

1.Supplied with power cord for fans, additional transformer and plug adapter available upon request.

2.Always switch on the electrical fan once the product is in operation.