

Coaxial Fixed Attenuator

SRFS-50XX24C8

DC-50 GHz, 1-40 dB, 8 Watts, 2.4mm, Bidirectional



Electrical

Impedance	50 ohm			
Frequency Range	DC-50 GHz			
VSWR	1.34 max			
Input Avg Power	8W@ 25°C ambient, derating linearly to 1W at 100°C			
Peak Power	100W (5 micro-sec pulse width, 3% duty cycle)			
Direction	Bidirectional, 2.4mm female to 2.4mm male (other configurations available)			

Attenuation(dB)	1-3	4-8	9-25	26-40
Accuracy(dB)	-0.7/+1.0	-0.8/+1.2	-0.8/+0.8	-0.9/+1.2


Mechanical

Connector Body	Passivated stainless steel
Heat Sink	Black anodized aluminum
Center Contact	1.27um Gold plated BeCu
Net Weight	Approx 38 g

Environmental


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 125°C
RoHS	Compliant
Temperature Coefficient	<0.0004 dB/dB/°C

Dimensions(mm)

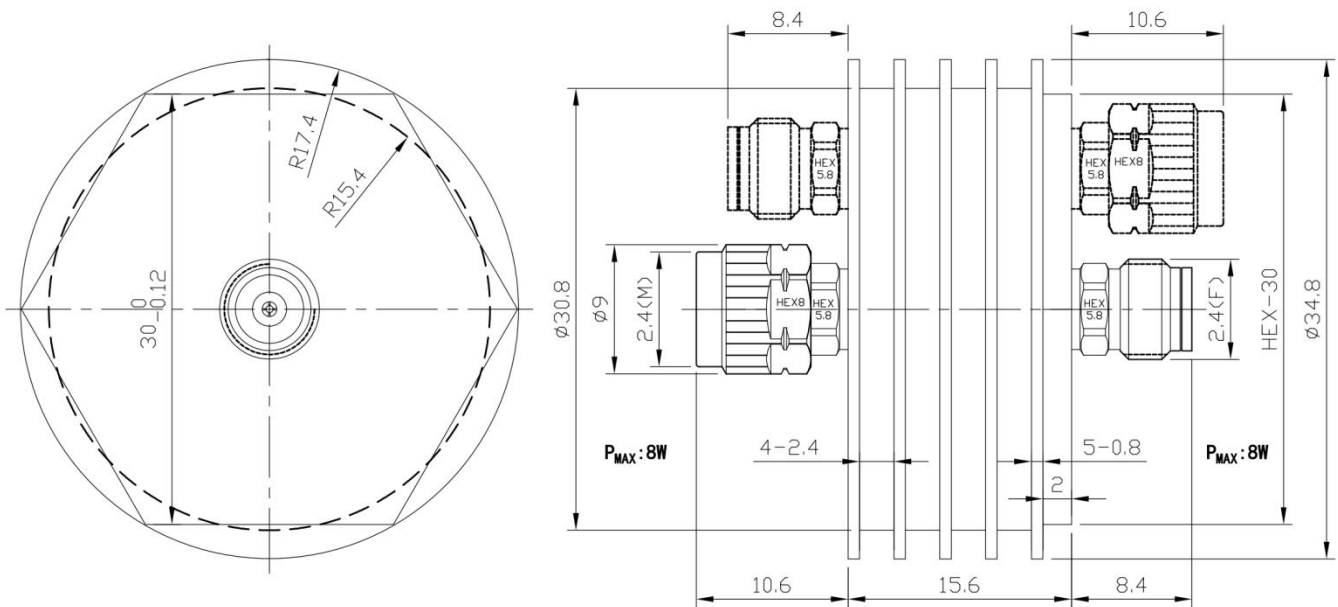


Typical Test Data


3dB

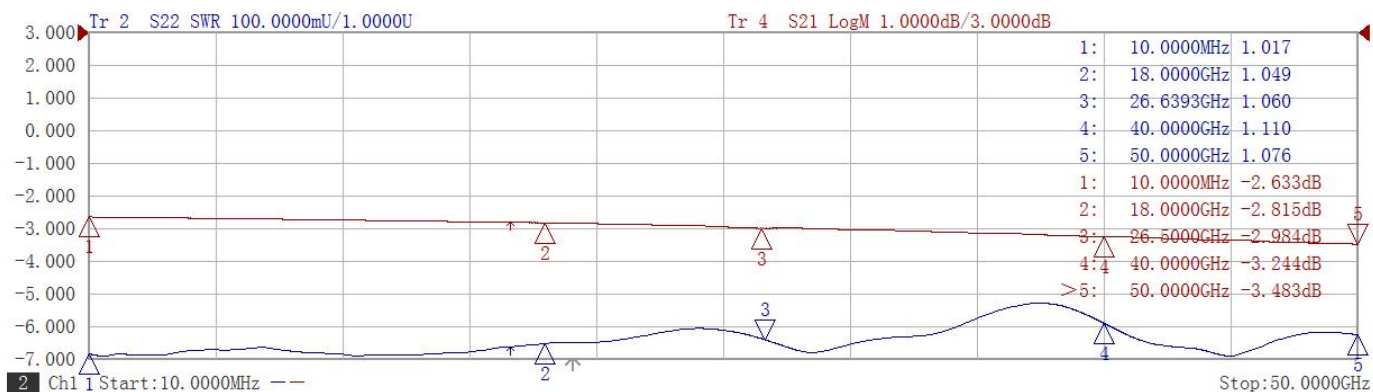

6dB

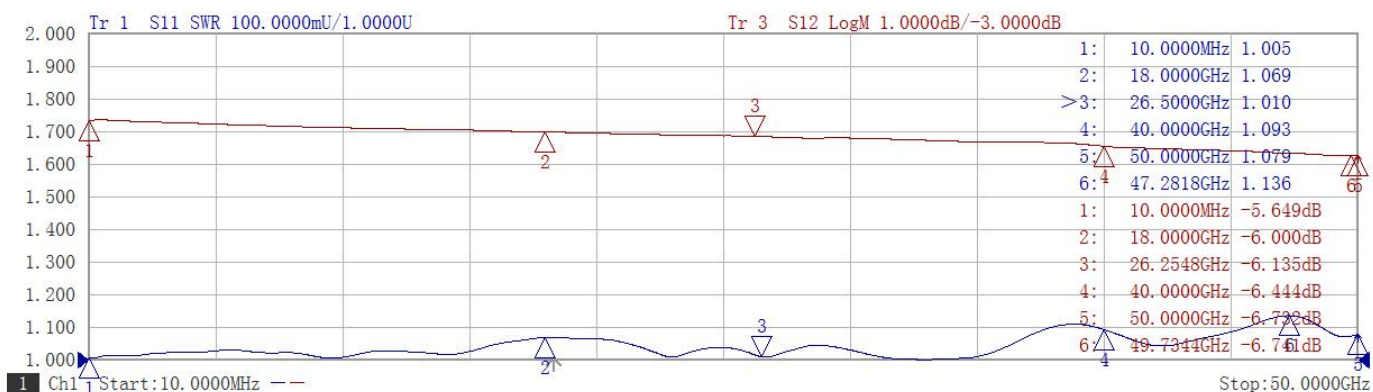

10dB

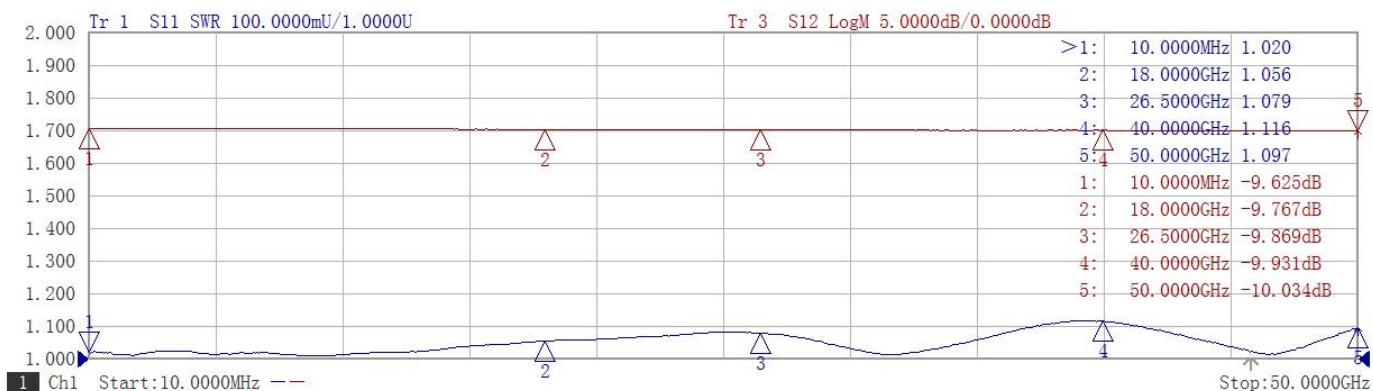

20dB

