

Coaxial Fixed Attenuator

SRFS-04XX100

DC-4 GHz, 6-60 dB, 100 Watts, N, Unidirectional



Electrical

Impedance	50 ohm					
Frequency Range	DC-4 GHz					
VSWR	1.2 max					
Input Avg Power	100W@ 25°C ambient, derating linearly to 10W at 100°C					
Peak Power	1kW (5 micro-sec pulse width, 5% duty cycle)					
Direction	Unidirectional, N male input, N female output (other configurations available)					

Attenuation(dB)	1-4	6-10	20	30	40	50,60
Accuracy(dB)	+0.8/-0	±0.8	±0.8	±0.9	±0.9	±1.0


Mechanical

Connector Body	Ternary alloy plated brass
Heat Sink	Black anodized aluminum
Center Contact	Gold plated beryllium copper/brass
Net Weight	Approx 1450 g


Environmental

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 125°C
RoHS	Compliant
Temperature Coefficient	<0.0004 dB/dB/°C

Dimensions(mm)

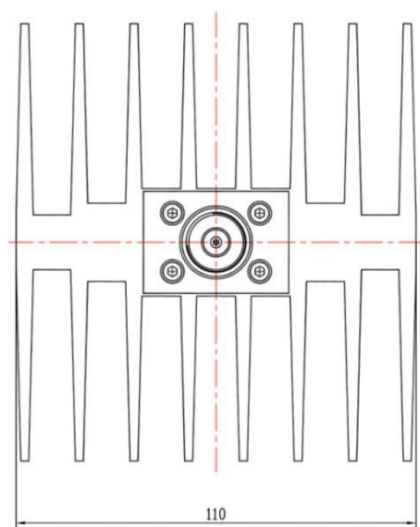

1-4dB: L1=70, L2=105

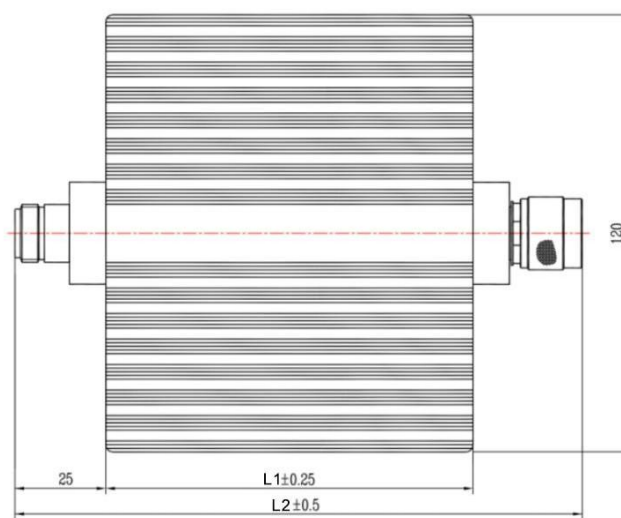

6-60dB: L1=101, L2=156