

Coaxial Fixed Attenuator

SRFS-06XX250

DC-6 GHz, 6-60 dB, 250 Watts, N, Unidirectional



Electrical

Impedance	50 ohm					
Frequency Range	DC-6 GHz					
VSWR	1.25 max					
Input Avg Power	250W@ 25°C ambient, derating linearly to 25W at 100°C					
Peak Power	1kW (5 micro-sec pulse width, 10% duty cycle)					
Direction	Unidirectional, N male input, N female output (other configurations available)					

Attenuation(dB)	3, 6	10	20	30	40	50, 60
Accuracy(dB)	±0.8	±0.8	±0.8	±0.9	±0.9	±0.9


Mechanical

Connector Body	Ternary alloy plated brass
Heat Sink	Black anodized aluminum
Center Contact	Gold plated beryllium copper/brass
Net Weight	Approx 3300 g

Environmental

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 125°C
RoHS	Compliant
Temperature Coefficient	<0.0004 dB/dB/°C

Dimensions(mm)

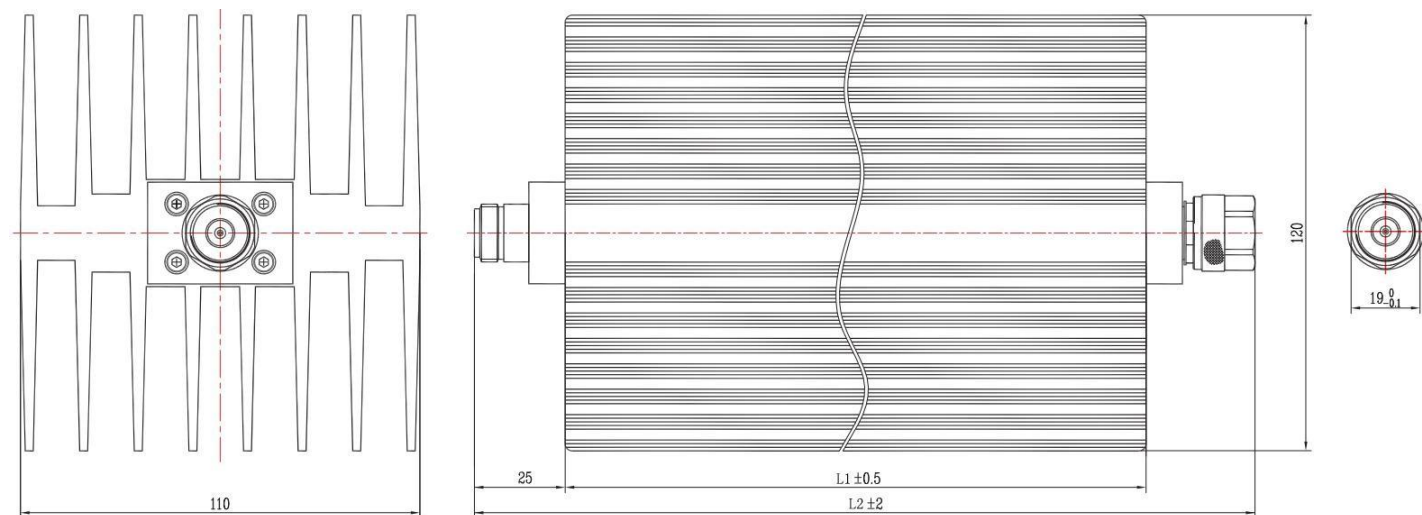

L1=152(3dB), L1=203(6dB), L1=254(10-60 dB)
L2=207(3dB), L2=258(6dB), L2=309(10-60 dB)