

Coaxial Fixed Attenuator

SRFS-67XX185D10

DC-67 GHz, 3-40 dB, 10 Watts, 1.85mm, Unidirectional



Electrical

Impedance	50 ohm			
Frequency Range	DC-67 GHz			
VSWR	1.45 max			
Input Avg Power	10W@ 25°C ambient, derating linearly to 1W at 100°C			
Peak Power	50W (5 micro-sec pulse width, 6% duty cycle)			
Direction	Unidirectional, 1.85mm male input, 1.85mm female output (other configurations available)			

Attenuation(dB)	3-10	20	30	40
Accuracy(dB)	-1.5/+1.8	-1.2/+1.5	-1.2/+1.5	-1.2/+1.5


Mechanical

Connector Body	Passivated stainless steel
Heat Sink	Black anodized aluminum
Center Contact	1.27um Gold plated BeCu
Net Weight	Approx 55 g

Environmental


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 125°C
RoHS	Compliant
Temperature Coefficient	<0.0004 dB/dB/°C

Dimensions(mm)

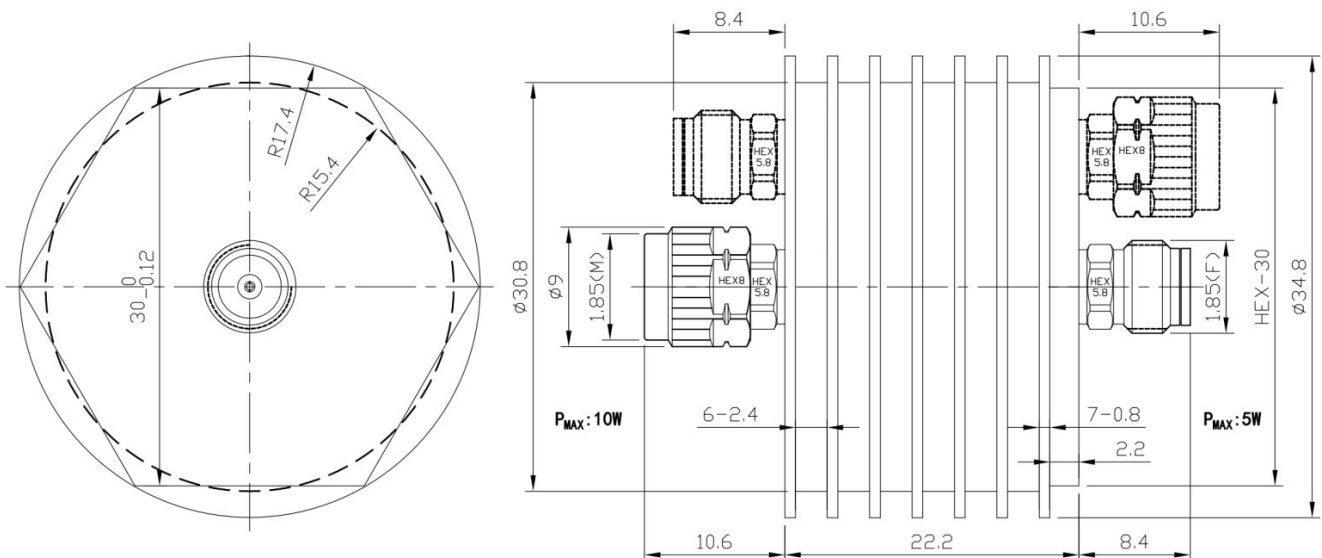


Typical Test Data

10dB

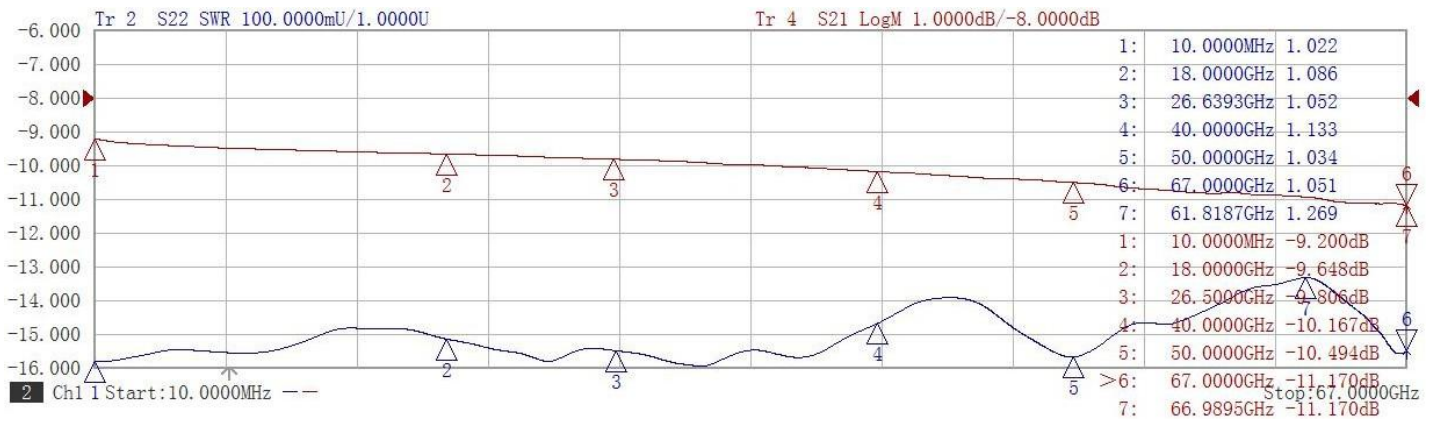

20dB

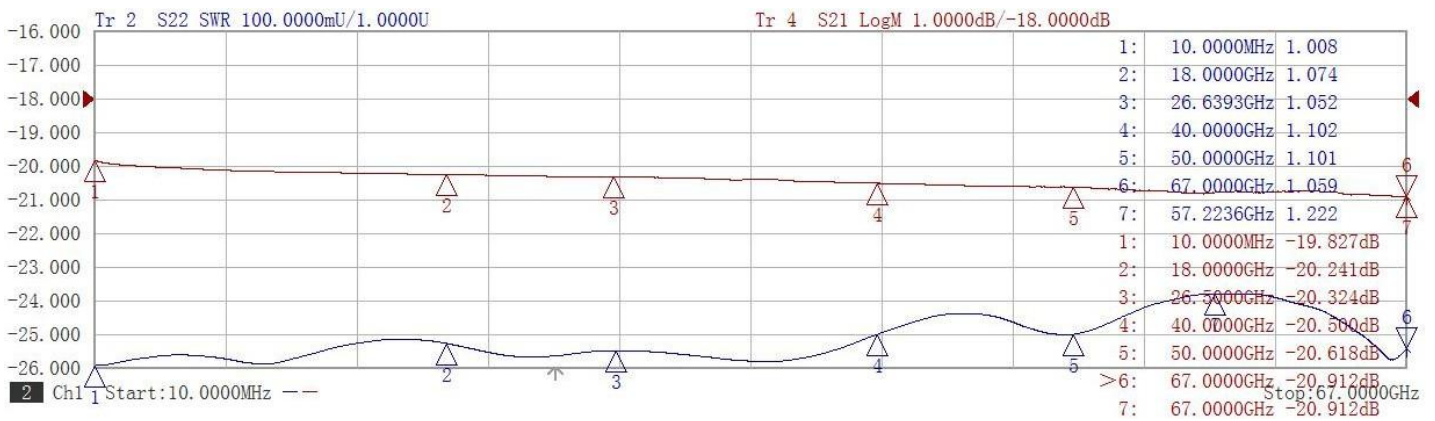

30dB

