

## Coaxial RF Termination

**SRFS-T0815N2**

**DC-8.5 GHz, N Male, 15 Watts**



### Electrical

|                        |                                                       |
|------------------------|-------------------------------------------------------|
| <b>Impedance</b>       | 50 ohm                                                |
| <b>Frequency Range</b> | DC-8.5 GHz                                            |
| <b>VSWR</b>            | 1.25 max                                              |
| <b>Input Avg Power</b> | 15W@ 25°C ambient, derating linearly to 1.5W at 100°C |
| <b>Peak Power</b>      | 500W (5 micro-sec pulse width, 1.5% duty cycle)       |


### Mechanical

|                       |                            |
|-----------------------|----------------------------|
| <b>Connector Body</b> | Ternary alloy plated brass |
| <b>Center Contact</b> | Gold plated brass          |
| <b>Heat Sink</b>      | Black anodized aluminum    |

### Environmental

|                       |                |
|-----------------------|----------------|
| <b>Operating Temp</b> | -55°C to 100°C |
| <b>Storage Temp</b>   | -55°C to 125°C |
| <b>RoHS</b>           | Compliant      |

### Dimensions(mm)

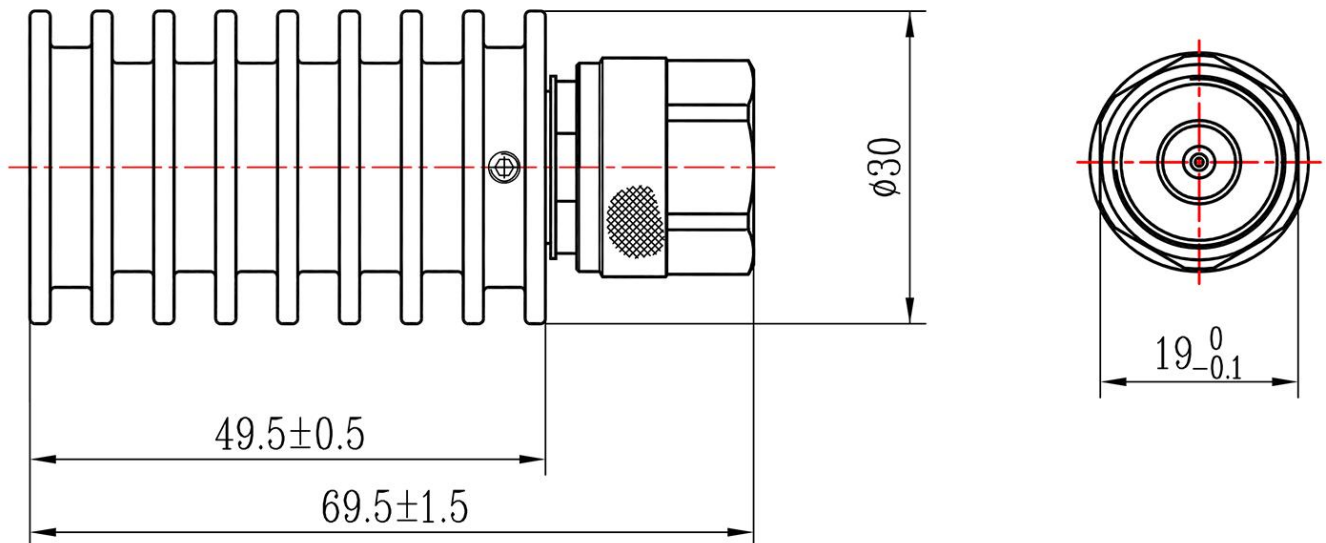

### Notes

1. Customized outlines and optimal VSWR available.
2. To maintain best performance, recommended to use fan to keep the case temperature under 85°C.