
1.0mm Male to Full Detent SMPS Male Adapter ADP11011B

Drawing(mm)



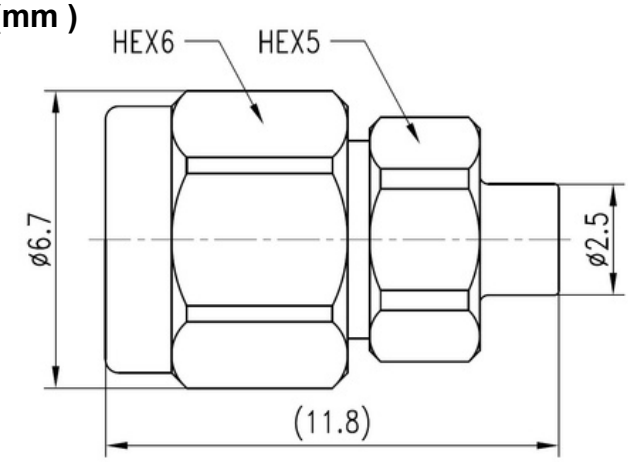

Electrical & Environmental

Imped a nce	50 ohm
Frequency Range	DC-100 GHz
VSWR	1.4 max (a pair of 1.0mm to SMPS adapter)
Operating Temp	- 55 ℃-+1 20 ℃

Material

Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper
Insulator	PEI

Typical Test Data

