Inner DC Block

DCB6067A



10MHz-67GHz, 1.85mm, 60 Volts


Electrical & Environmental

Impedance	50 ohm
Frequency Range	10 MHz-67 GHz
VSWR	1.5 max
Insertion Loss	0.9dB max
Voltage Rating	60 Volts max
Input Avg Power	1.5 Watts max @25℃ (Derate linearly to 0.15 Watt at 100°C)
Operating Temp	-55℃ to 100℃
RoHS	Compliant

Mechanical

Connector	1.85mm
Connector Body	Passivated Stainless Steel
Center Contact	1.27um Gold plated beryllium copper
Net Weight	About 3.5g

Dimensions(mm)

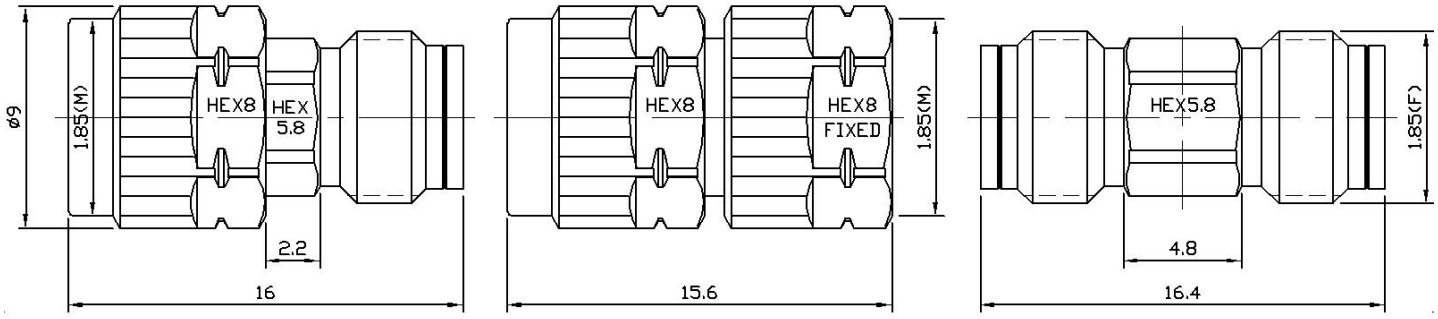

A: male to female **B: male to male** **C: female to female**

Note:

· By default the connector configuration is A.

· Options of B and C also available upon request. Change P/N DB6067A to DB6067B or DB6067C when applicable.

Typical Test Data

