Inner DC Block

DCB6034A

10MHz-34GHz, 3.5mm, 60 Volts




Electrical & Environmental

Impedance	50 ohm
Frequency Range	10 MHz-34 GHz
VSWR	1.3 max
Insertion Loss	0.5dB max
Voltage Rating	60 Volts max
Input Avg Power	2 Watts max @25℃ (Derate linearly to 0.2 Watt at 100°C)
Operating Temp	-55℃ to 100℃
RoHS	Compliant

Mechanical

Connector	3.5mm
Connector Body	Passivated Stainless Steel
Center Contact	1.27um Gold plated beryllium copper
Net Weight	About 3.5g

Dimensions(mm)

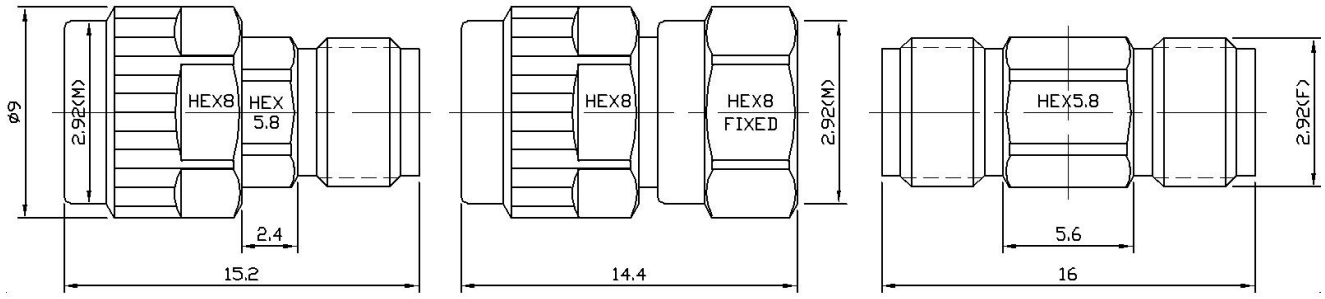

DCB6034A **DCB6034B** **DCB6034C**

Inner DC Block

DCB6034A



10MHz-34GHz, 3.5mm, 60 Volts

Typical Test Data

