Inner DC Block

10MHz-50GHz, 2.4mm, 60 Volts




Electrical & Environmental

Impedance	50 ohm
Frequency Range	10 MHz-50 GHz
VSWR	1.35 max
Insertion Loss	0.6dB max
Voltage Rating	60 Volts max
Input Avg Power	2 Watts max @25℃ (Derate linearly to 0.2 Watt at 100°C)
Operating Temp	-55℃ to 100℃
RoHS	Compliant

Mechanical

Connector	2.4mm
Connector Body	Passivated Stainless Steel
Center Contact	1.27um Gold plated beryllium copper
Net Weight	About 3.5g

Dimensions(mm)

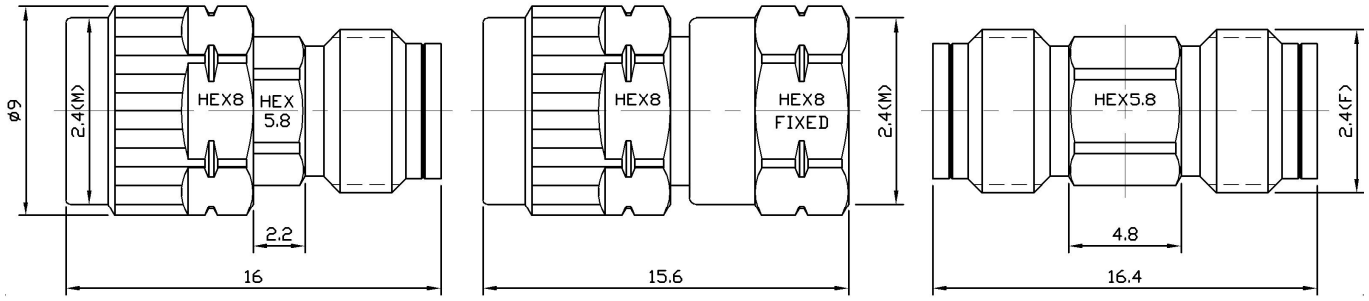

A: male to female **B: male to male** **C: female to female**

Typical Test Data

