Inner DC Block

DCB5050A



50kHz-50GHz, 2.4mm, 50 Volts


Electrical & Environmental

Impedance	50 ohm
Frequency Range	50 kHz-50 GHz
VSWR	1.45 max
Insertion Loss	1.0dB max
Voltage Rating	50 Volts max
Operating Temp	-55℃ to 125℃
RoHS	Compliant

Mechanical

Connector	2.4mm
Connector Body	Passivated Stainless Steel
Center Contact	Gold plated beryllium copper
Net Weight	Approx 5g

Dimensions(mm)

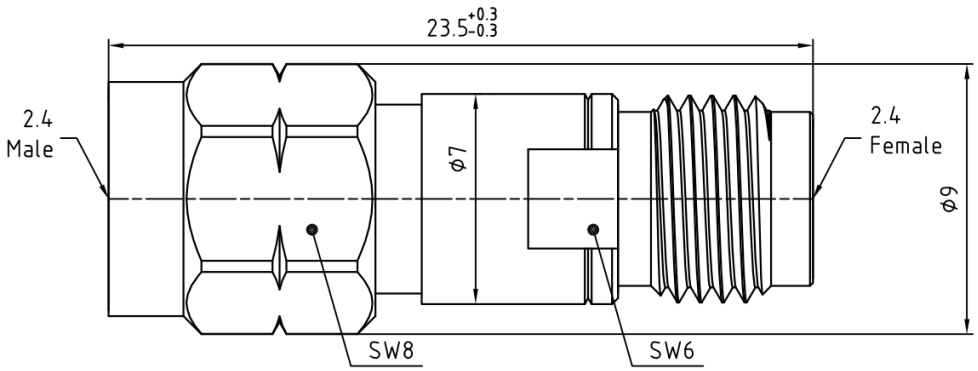


Inner DC Block

DCB5050A



50kHz-50GHz, 2.4mm, 50 Volts

Typical Test Data

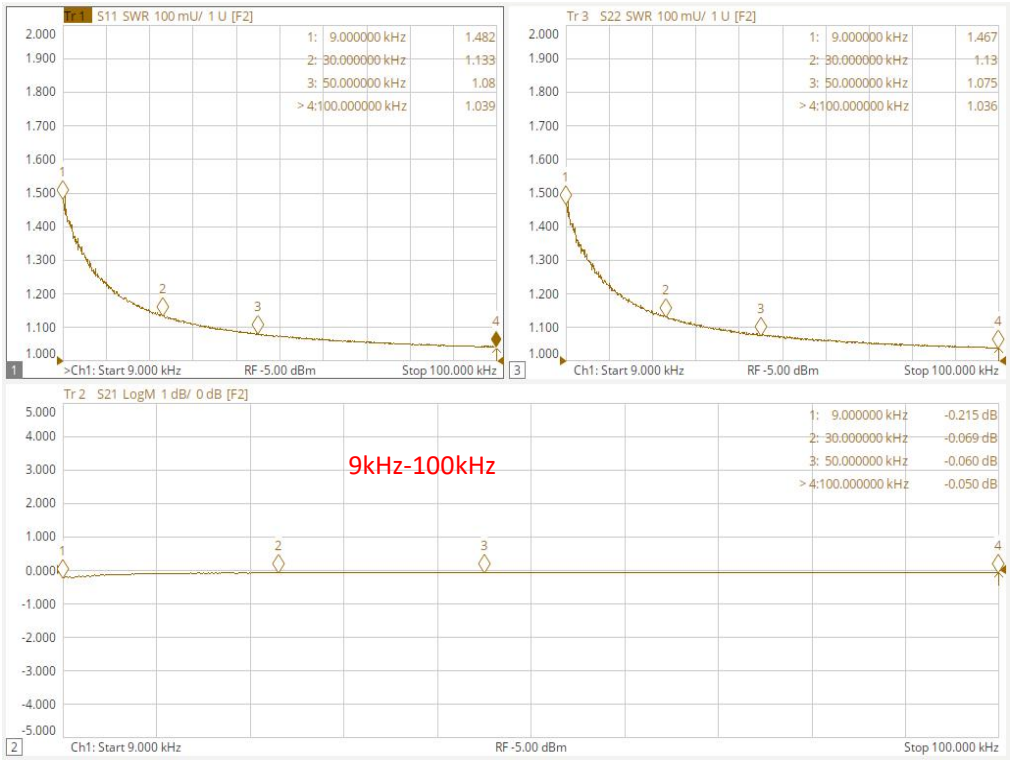



Inner DC Block

DCB5050A



50kHz-50GHz, 2.4mm, 50 Volts

Typical Test Data

