## Low PIM DIN 7/16 Female to DIN 7/16 Male Adapter ADP0602L

### Drawing(mm)

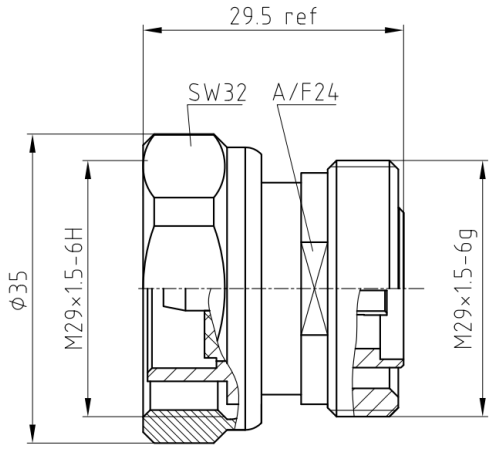




### Electrical & Environmental

| | |
|---|---|
| **Impedance** | 50 ohm |
| **Frequency Range** | DC-6 GHz |
| **VSWR** | 1.25 max |
| **PIM (Intermod)** | -160dBc min with 2×20W tones |
| **Operating Temp** | -40℃ ~ +125℃ |
| **RoHS** | Compliant |

### Material

| | |
|---|---|
| **Connector Body** | Ternary alloy plated brass |
| **Center Contact** | Silver plated brass |
| **Insulator** | PTFE |
| **Weight** | 91g |