
N Female to TNCA Male Right Angle Adapter

ADP1869B-R

Drawing(mm)



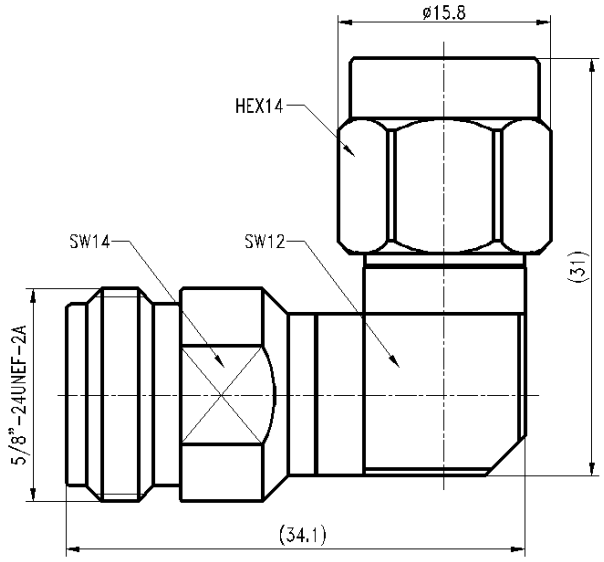

Electrical & Environmental

Impedance	50 ohm
Frequency Range	DC-18 GHz
VSWR	1.25 max
Operating Temp	-55℃ to +165℃
Interface	N&TNCA per MIL-STD-348

Material

Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper / Gold plated brass
Insulator	PEI & PTFE

Typical Test Data

