BNC Male to SMA Female Adapter

ADP0408P

Drawing(mm)

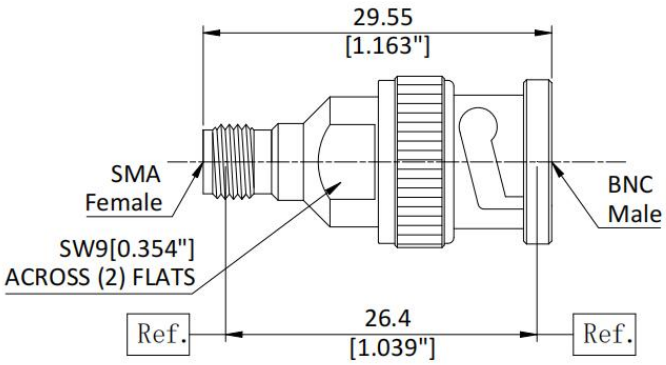

Electrical & Environmental

Impedance	50 ohm
Frequency Range	DC-4 GHz
VSWR	1.15 max
Operating Temp	-55℃ to +165℃
Interface	Per MIL-STD-348

Material

Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper
Insulator	PTFE
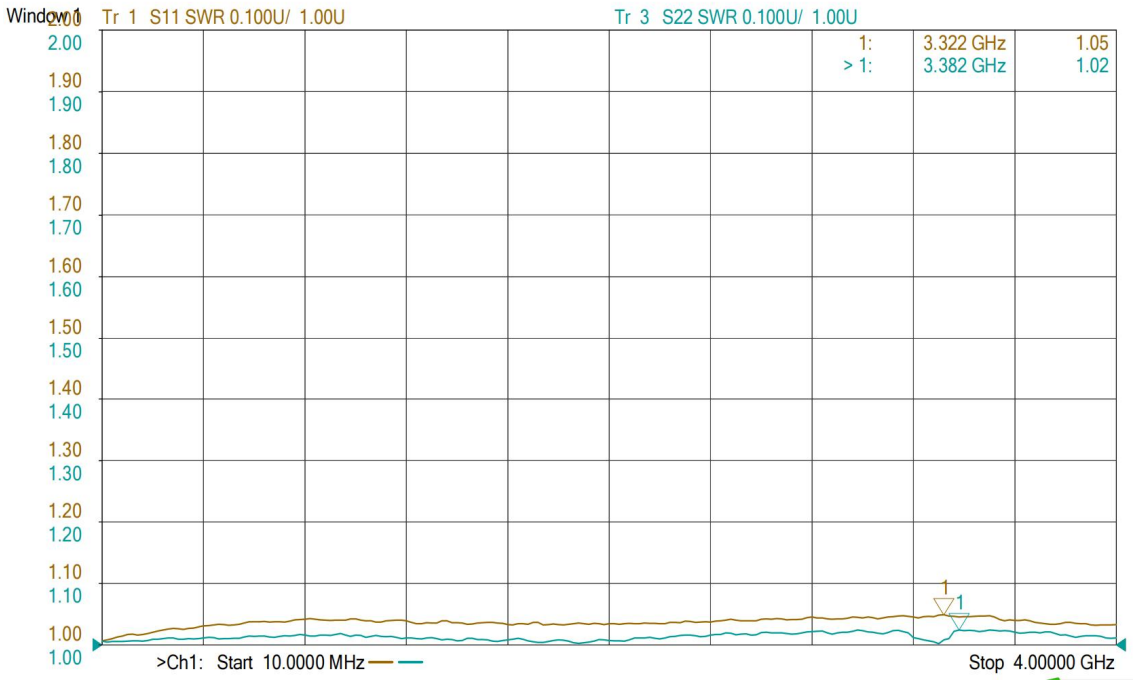
Typical Test Data