



SMA Male to SMA Female Adjustable Phase Trimmer, DC-26.5 GHz

SRFS2701


Electrical

Impedance	50 ohm
Frequency Range	DC-26.5 GHz
VSWR	≤1.4
Insertion Loss	≤0.7 dB
Phase Adjustment Max	13.6°/GHz (360°@26.5GHz)
Nominal Phase Shift	0. 6° /GHz/Turn

Mechanical & Environmental

RF Connectors	SMA Male	SMA Female
Body Material	Passivated stainless steel	
Center Contact	Gold plated beryllium copper/brass	
Insulator	PTFE	
Operating Temp	-55°C to +165°C	
Net Weight	Approx 15g	

Dimensions(mm)

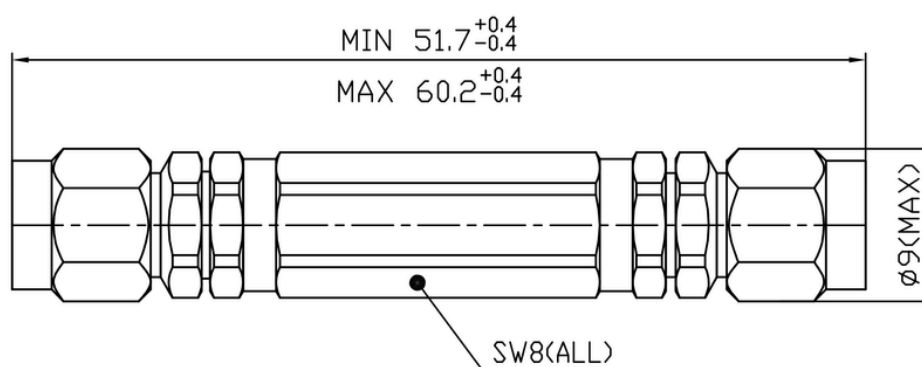



SMA Male to SMA Female Adjustable Phase Trimmer, DC-26.5 GHz

SRFS2701

Typical Test Data

