## SMA Male to SSMA Female Adapter

**ADP1832B**

### Drawing(mm)

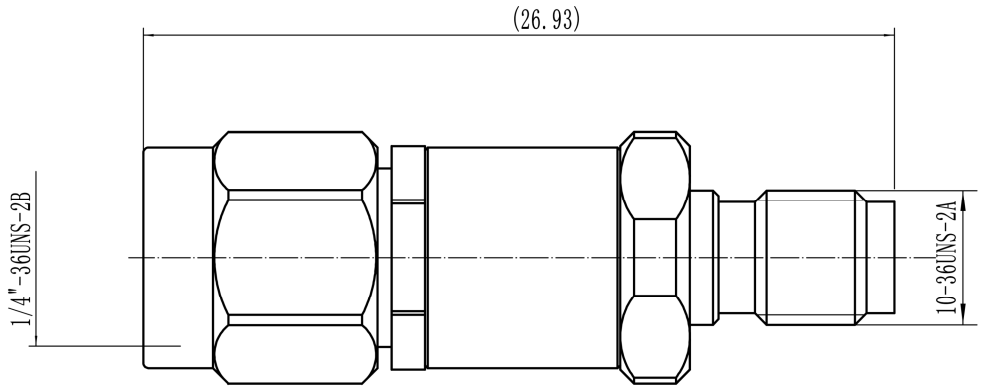




### Electrical & Environmental

| | |
|---|---|
| **Impedance** | 50 ohm |
| **Frequency Range** | 18 GHz |
| **VSWR** | 1.15 max |
| **Operating Temp** | -55℃ to +165℃ |
| **Interface** | SMA&SSMA per MIL-STD-348 |

### Material

| | |
|---|---|
| **Connector Body** | Passivated stainless steel |
| **Center Contact** | Gold plated beryllium copper |
| **Insulator** | PEI&PTFE |

### Typical Test Data

