
SSMA Female to SMP Male Limited Detent Adapter

ADP4037B

Drawing(mm)



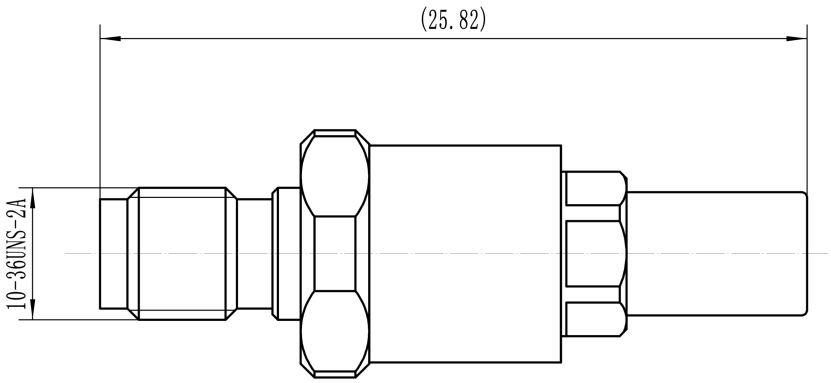

Electrical & Environmental

Impedance	50 ohm
Frequency Range	40 GHz
VSWR	1.3 max
Operating Temp	-55℃ to +165℃
Interface	SSMA&SMP per MIL-STD-348

Material

Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper
Insulator	PEI&PTFE

Typical Test Data

