
SSMA Male to 3.5mm Male Adapter

ADP2720B

Drawing(mm)



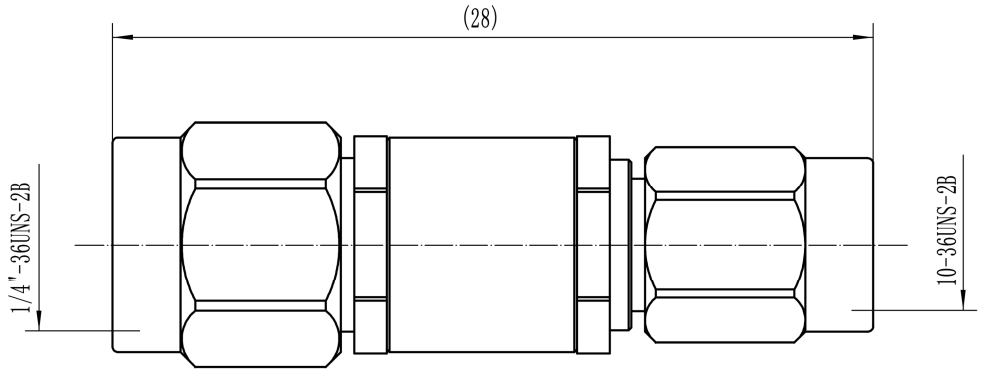

Electrical & Environmental

Impedance	50 ohm
Frequency Range	34 GHz
VSWR	1.15(DC-27GHz), 1.2(DC-34GHz)
Operating Temp	-55℃ to +165℃
Interface	3.5mm per IEC 60169, SSMA per MIL-STD-348

Material

Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper
Insulator	PEI

Typical Test Data

