
TNC Female to SMA Female 4 Hole Flange Adapter

ADP1827P-F1

Drawing(mm)

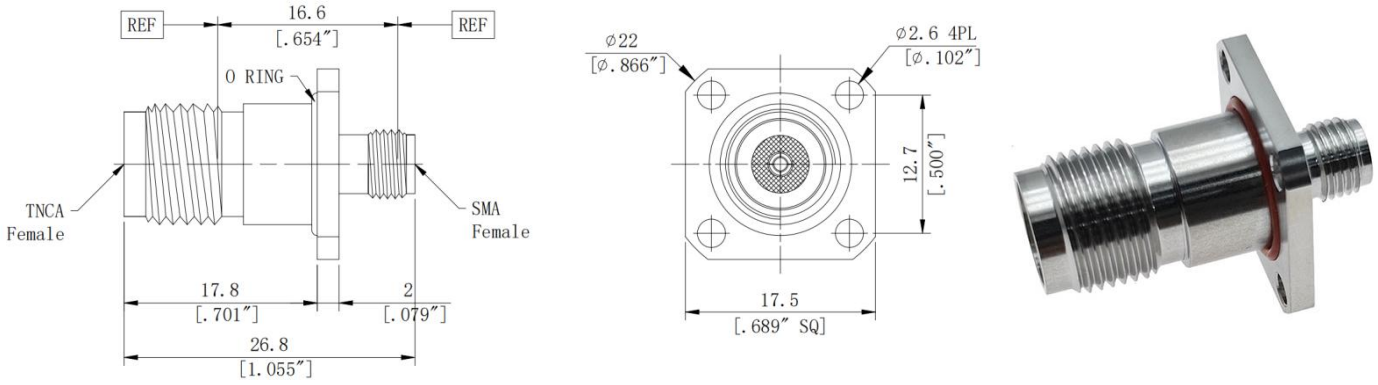

Electrical & Environmental

Impedance	50 ohm
Frequency Range	18 GHz
VSWR	1.2 max
Operating Temp	-55℃ to +165℃
Interface	TNCA&SMA per MIL-STD-348

Material

Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper
Insulator	PEI&PTFE

Typical Test Data

