ADPWR15185EL



WR15 to 1.85mm Female Waveguide to Coaxial Adapter
UG385/U Flange, End Launch

Electrical

Frequency Range	50-70 GHz
VSWR	1.35 max

Configuration

Waveguide Size	IEC	620
	EIA	WR15
Flange	IEC	/
	North America	UG385/U
Coax Connector	1.85mm Female	
Body Geometry	End Launch	

Mechanical & Environmental


Waveguide Body	Cu, gold plated
Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper
Operating Temperature	-40℃ to +85℃
Connector Interface	IEC-61169
RoHS	Compliant under exemptions 6 (b) or 6 (c)
Net Weight	Approx 29g

ADPWR15185EL



WR15 to 1.85mm Female Waveguide to Coaxial Adapter
UG385/U Flange, End Launch

Dimensions(mm)

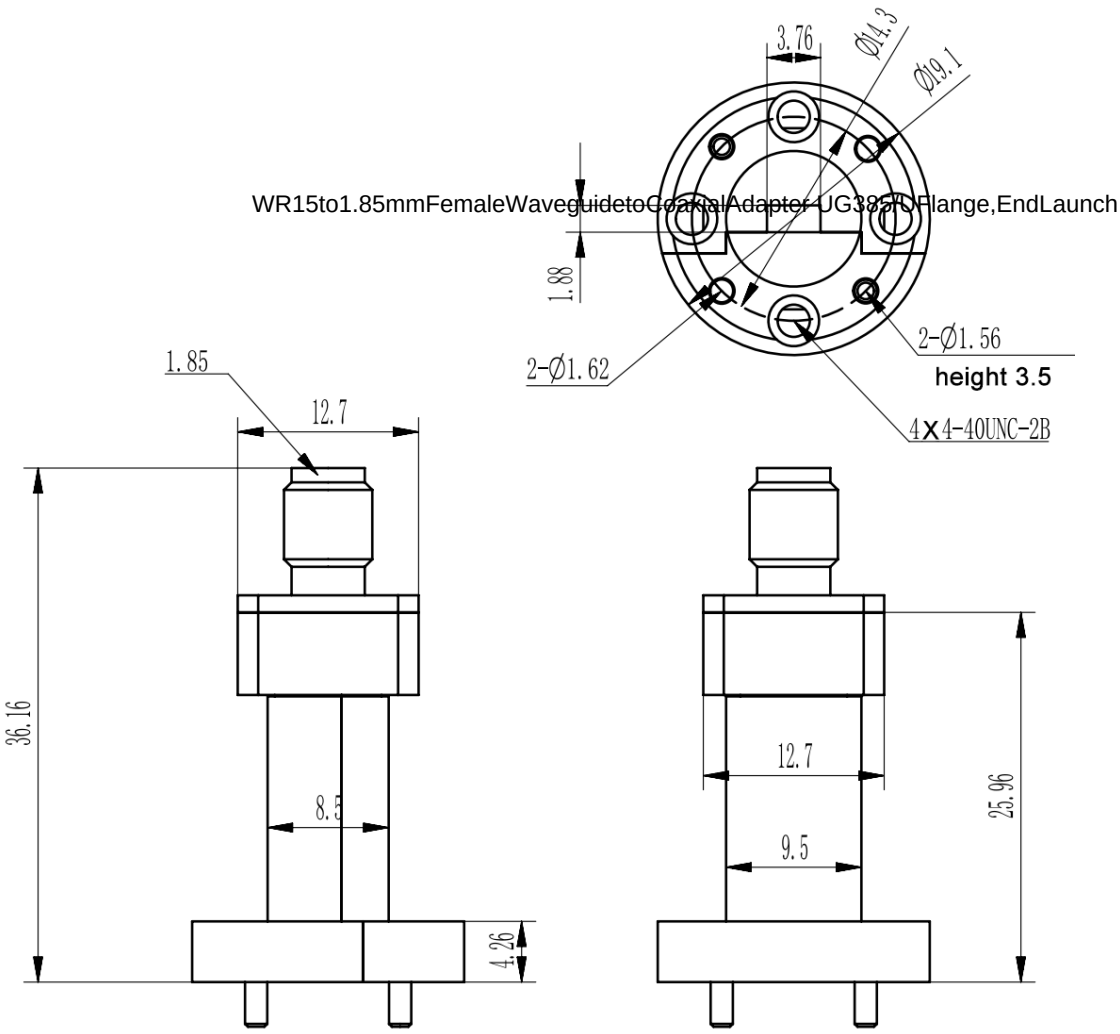


ADPWR15185EL




WR15 to 1.85mm Female Waveguide to Coaxial Adapter

UG385/U Flange, End Launch

Typical Test Data at 25℃

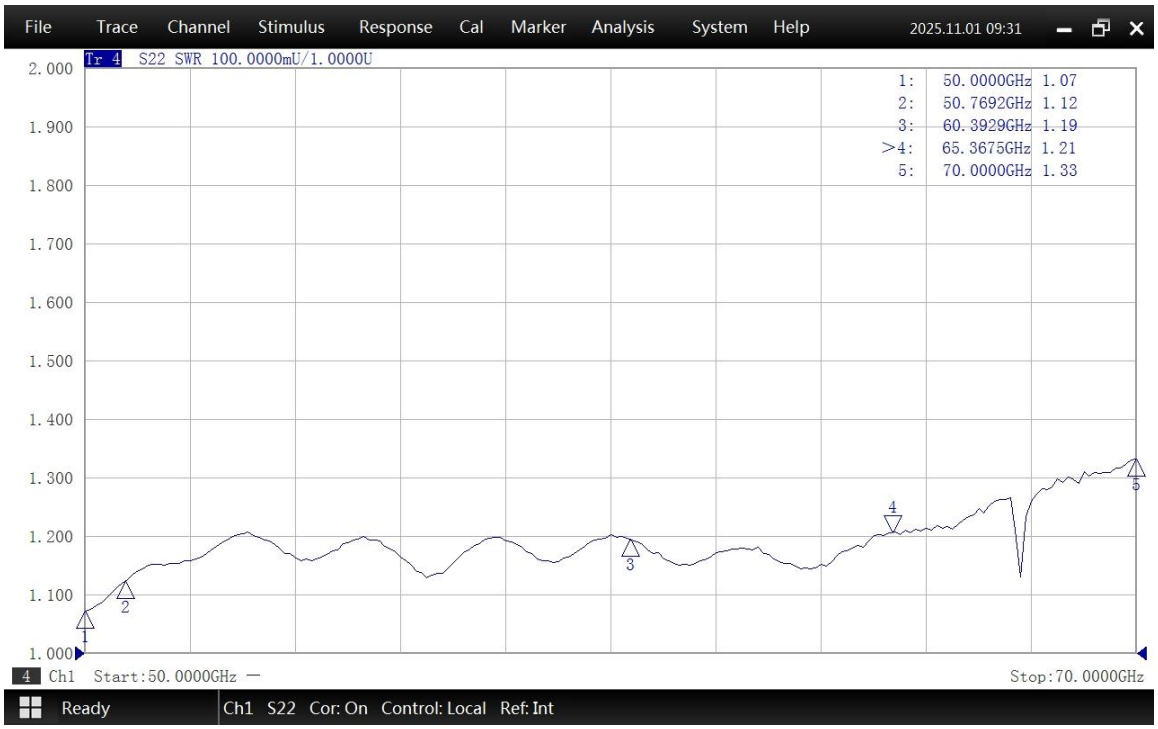

VSWR

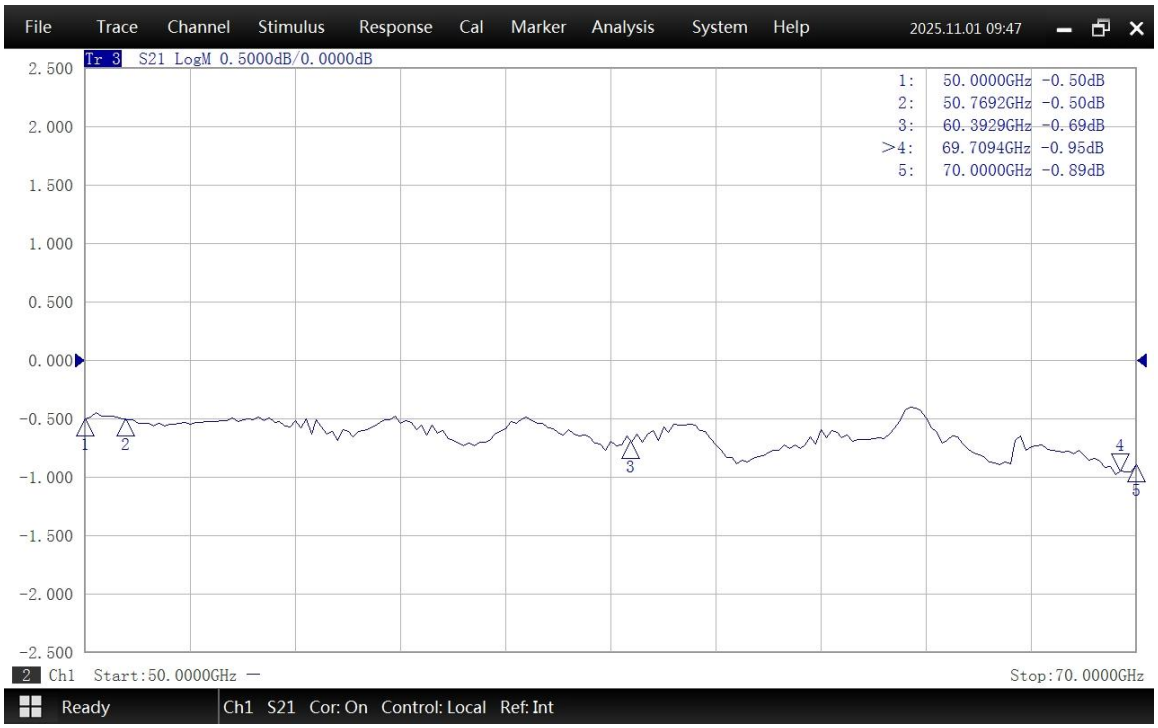

Insertion Loss*

* In Insertion Loss (IL) testing, adapters are measured back-to-back. To obtain the loss of a single adapter, divide the measured value by two.