



## 1.5 -8.0 GHz High Pass Filter SRFS-HPF-1D5GS1

## Specifications

| | | |
|---|---|---|
| 1 | Pass Band Frequency | 1.5 ~8.0 GHz |
| 2 | Pass Band Insertion Loss | ≤2.0dB @ 1.5 ~1.65 GHz<br>≤1.0dB @1.65 ~8.0 GHz |
| 3 | Pass Band VSWR | ≤1.5 |
| 4 | Stop Band Attenuation | ≥60dB @ DC ~1.28 GHz |
| 5 | Impedance | 50 ohms |
| 6 | Power | ≤15W |
| 7 | Connectors | SMA-Female |
| 8 | Surface Finish | Black Paint |
| 9 | Temperature Range | -55℃ ~ +85℃ |
| 10 | Weight | 70 g |

## Dimensions (Unit: mm)

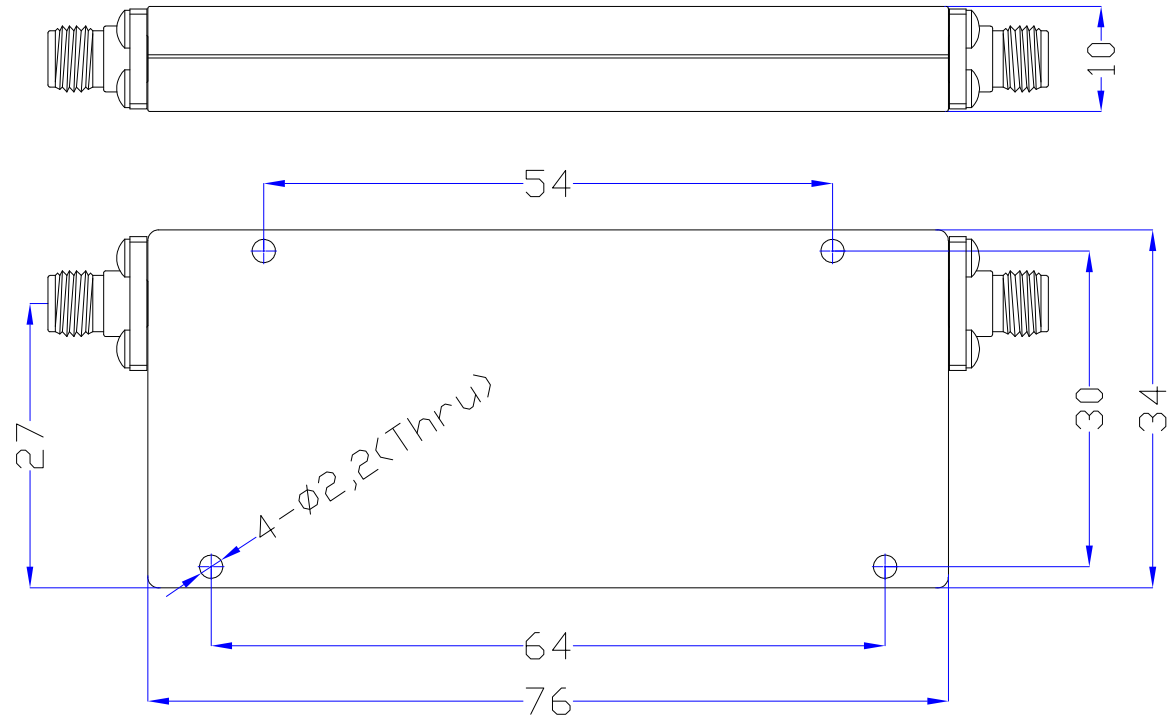

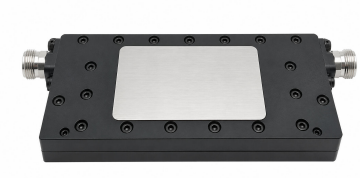

## 1.5 -8.0 GHz High Pass Filter SRFS-HPF-1D5GS1

-

## Typical Test Data

