


2-3 GHz Band Pass Filter

SRFS-BPF-2500MS1

Specifications

1	Center Frequency (F0)	2.5GHz
2	Pass Band Frequency	2 ~ 3 GHz
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band Ripple	≤0.5dB
5	Pass Band VSWR	≤1.5
6	Stop Band Rejection	≥50dB @ DC ~ 1.8GHz ≥50dB @ 3.2 ~ 5GHz
7	Impedance	50 Ohms
8	Power Handling	5W max
9	Connectors	SMA-Female
10	Surface Finish	Black Painted
11	Temperature Range	-30℃ ~ +70℃
12	Net Weight	65g

Dimensions(mm)

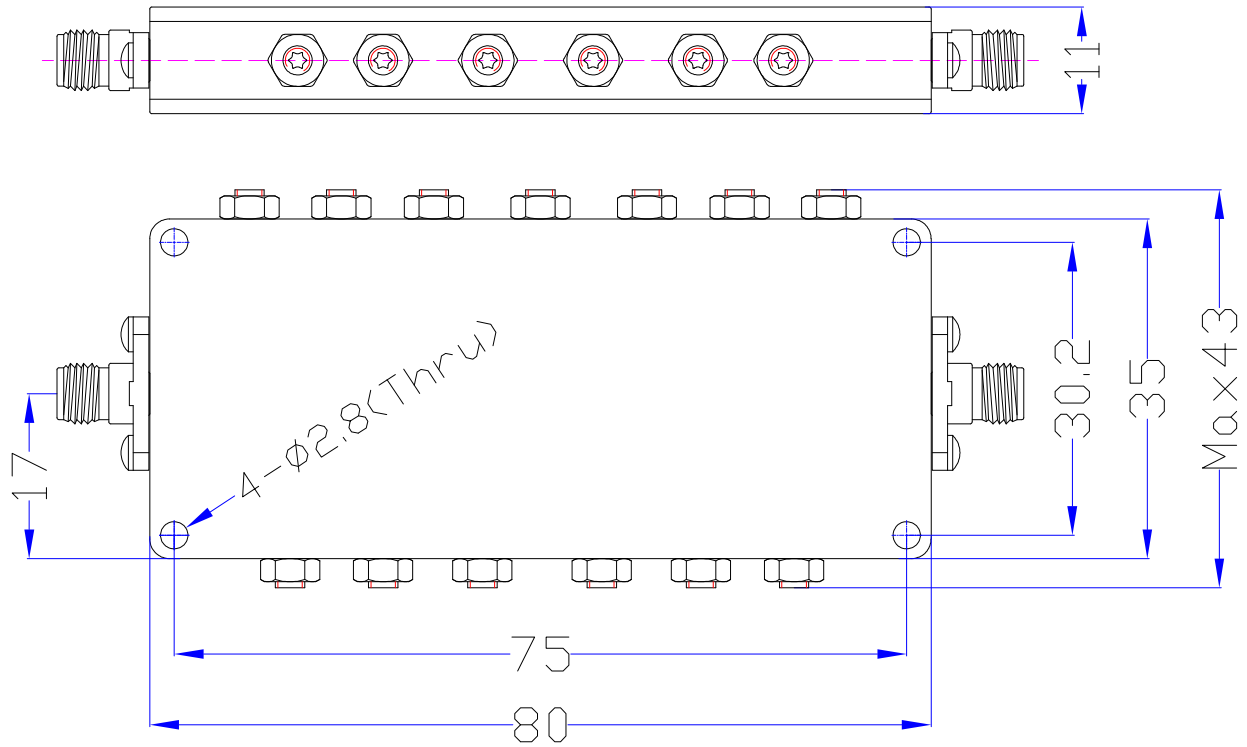



2-3 GHz Band Pass Filter SRFS-BPF-2500MS1

Typical Test Data

