


2.0-4.0 GHz Band Pass Filter SRFS-BPF-3000MS1

Specifications

1	Center Frequency(F0)	3.0GHz
2	Pass Band Frequency	2.0 ~ 4.0GHz
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band Ripple	≤0.6dB
5	Pass Band VSWR	≤1.6
6	Stop Band Rejection	≥70dB @ DC ~ 1.4GHz ≥70dB @ 4.6 ~ 5.5GHz
7	Impedance	50 Ohms
8	Power Handling	2W max
9	Connectors	SMA-Female
10	Surface Finish	Black Painted
11	Temperature Range	-30℃ ~ +70℃

Dimensions(mm)

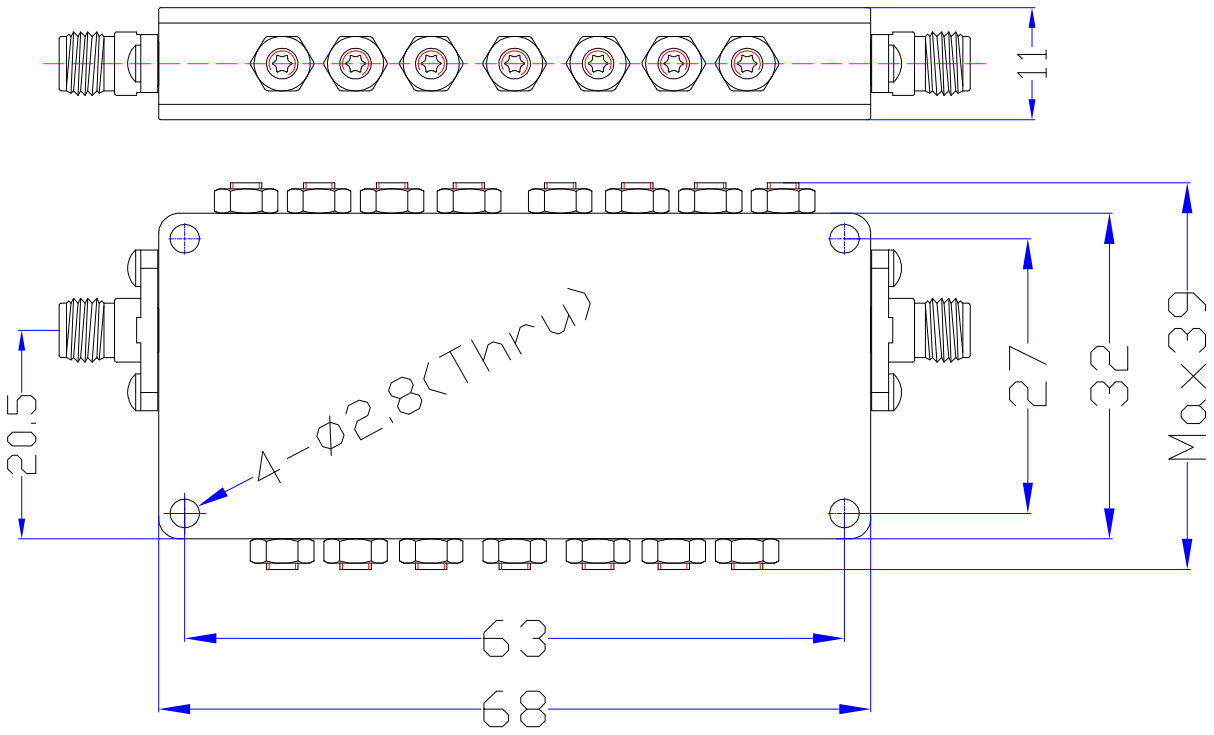



2.0-4.0 GHz Band Pass Filter SRFS-BPF-3000MS1

Typical Test Data

