


2000-2500 MHz Band Pass Filter SRFS-BPF-2250MS1

Specifications

1	Center Frequency(F0)	2250MHz	
2	Pass Band Frequency	2000 ~ 2500MHz	
3	Pass Band Insertion Loss	≤0.6dB @ 2250MHz ≤1.0dB @ 2000 ~ 2500MHz	
4	Pass Band Ripple	≤0.6dB	
5	Pass Band Return Loss	≥14dB	
6	Stop Band Rejection	≥70dB @ DC ~ 1650MHz	≥70dB @ 2850 ~ 4000MHz ≥25dB @ 4000 ~ 6000MHz
7	Impedance	50 Ohms	
8	Power Handling	5W max	
9	Connectors	SMA-Female, SMA-Male	
10	Surface Finish	Black Painted	
11	Temperature Range	-30℃ ~ +70℃	
12	Net Weight	65g	

Dimensions(mm)

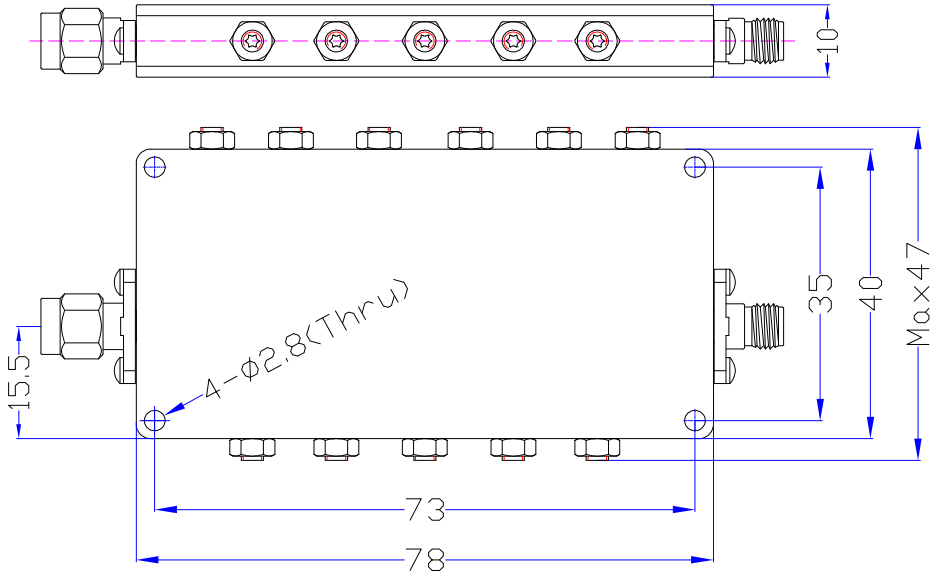



2000-2500 MHz Band Pass Filter SRFS-BPF-2250MS1

Typical Test Data

