


5-6 GHz Band Pass Filter SRFS-BPF-5500MS1

Specifications

1	Center Frequency (F0)	5.5GHz	
2	Pass Band Frequency	5 ~ 6 GHz	
3	Pass Band Insertion Loss	≤1.0dB	
4	Pass Band Ripple	≤0.5dB	
5	Pass Band VSWR	≤1.22	
6	Stop Band Rejection	≥80dB @ DC ~ 4.45GHz ≥30dB @ 4.45 ~ 4.8GHz	≥30dB @ 6.2 ~ 6.4GHz ≥80dB @ 6.4 ~ 13GHz
7	Impedance	50 Ohms	
8	Power Handling	10W max	
9	Connectors	SMA-Female	
10	Surface Finish	Black Painted	
11	Temperature Range	-30℃ ~ +70℃	

Dimensions(mm)

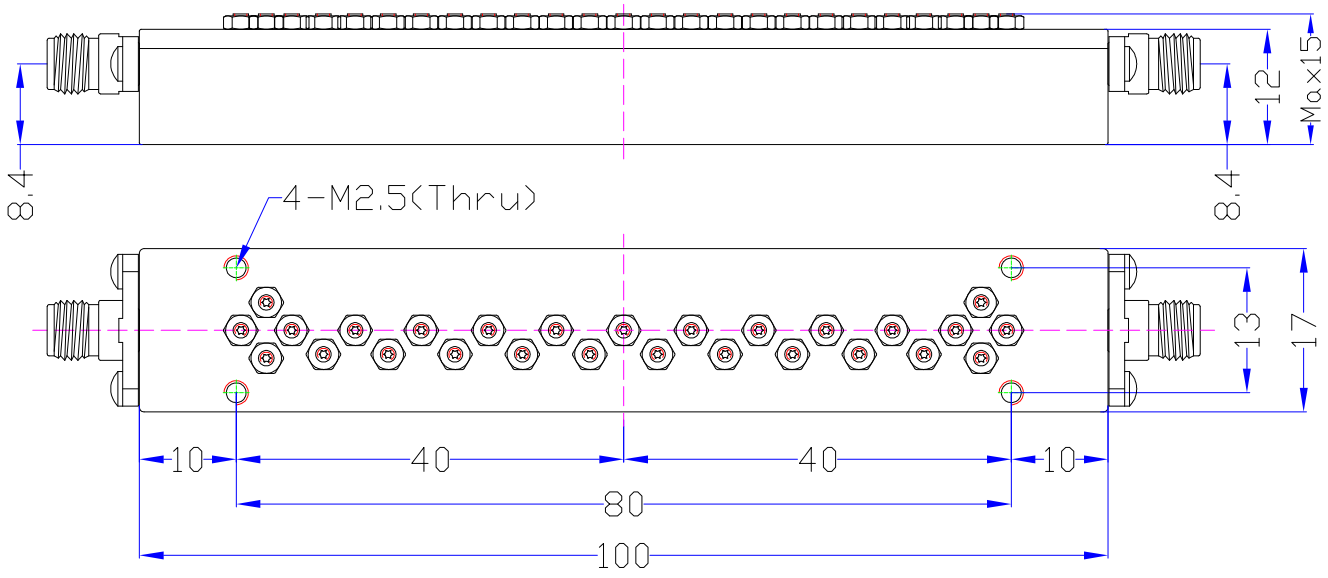



5-6 GHz Band Pass Filter SRFS-BPF-5500MS1

Typical Test Data

