


# SRFS-HPF-5GS1

## Specifications

| | | |
|---|---|---|
| 1 | Pass Band Frequency | 5.0~22.0 GHz |
| 2 | Pass Band Insertion Loss | ≤2.0dB @ 5.0~5.25 GHz<br>≤1.0dB @ 5.25~22.0 GHz |
| 3 | Pass Band VSWR | ≤1.5 |
| 4 | Stop Band Attenuation | ≥60dB @ DC~4.48 GHz |
| 5 | Impedance | 50 ohms |
| 6 | Power | ≤15W |
| 7 | Connectors | SMA-Female |
| 8 | Surface Finish | Black Paint |
| 9 | Temperature Range | -55℃ ~ +85℃ |
| 10 | Weight | 25 g |

## Dimensions (Unit: mm)

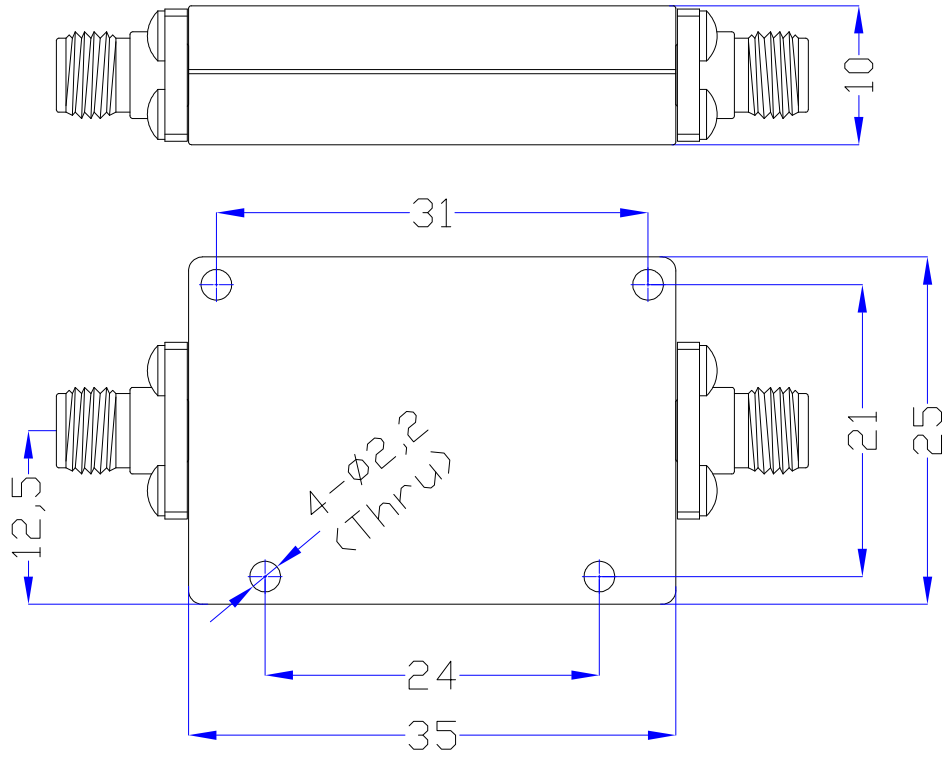



## 5.0-22.0 GHz High Pass Filter SRFS-HPF-5GS1

## Typical Test Data

