


WR137 Waveguide to Coaxial Adapter Right Angle Part no. SRFS70WCANKPC

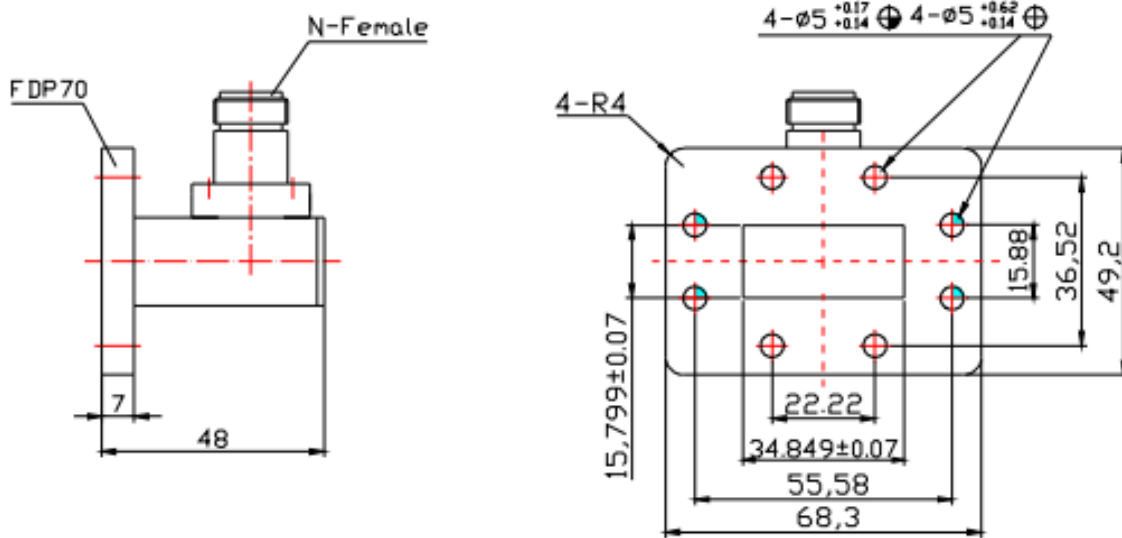

Mechanical Specifications	
Waveguide Type	WR137
Connector type	N Female
Material	Copper
Inside Finish	Silver plating
Outside Finish	Anticorrosion grey paint
Flange Type	FDP70 (Cover)
Electrical Specifications	
Frequency Range	5.38-8.17 GHz
VSWR (Max)	1.25