


WR187 Waveguide to Coaxial Adapter Right Angle Part no. SRFS48WCASKPA

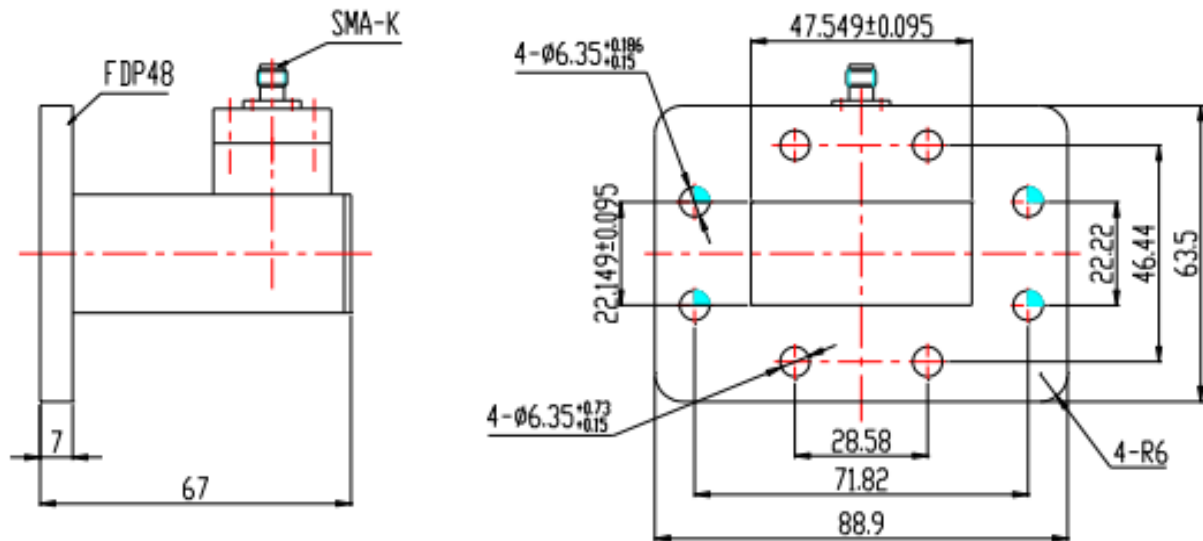

Mechanical Specifications	
Waveguide Type	WR187
Connector type	SMA Female
Material	Aluminum
Inside Finish	Chromate conversion
Outside Finish	Anticorrosion grey paint
Flange Type	FDP48 (Cover)
Electrical Specifications	
Frequency Range	3.94-5.99 GHz
VSWR (Max)	1.25