


WR62 Waveguide to Coaxial Adapter Right Angle Part no. SRFS140WCANKPC

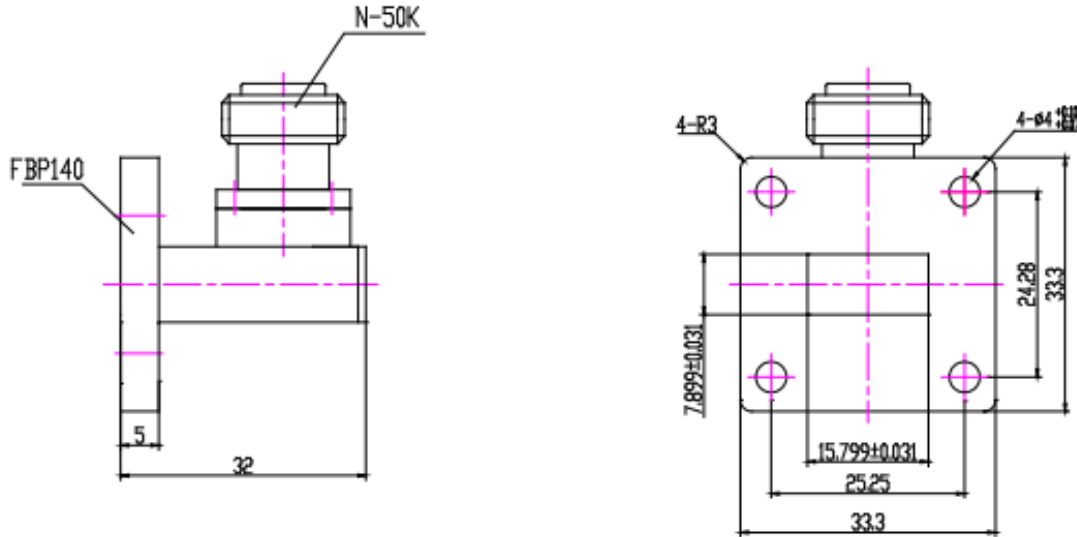

Mechanical Specifications	
Waveguide Type	WR62
Connector type	N Female
Material	Copper/Brass
Inside Finish	Silver plating
Outside Finish	Anticorrosion grey paint
Flange Type	FBP140 (Cover)
Operating Temperature	-30°C to +70°C
Electrical Specifications	
Frequency Range	9.84-15 GHz
VSWR (Max)	1.25
Insertion Loss (Max)	0.3 dB
Power Handling	100 W (CW)