


3.4-3.8 GHz Band Pass Filter SRFS-BPF-3600MS1

Specifications

1	Center Frequency(F0)	3.6GHz
2	Pass Band Frequency	3.4 ~ 3.8GHz
3	Pass Band Insertion Loss	≤1.0dB
4	Pass Band Ripple	≤0.4dB
5	Pass Band VSWR	≤1.22
6	Stop Band Rejection	≥40dB @ DC ~ 3.2GHz ≥50dB @ 4.0 ~ 9.0GHz
7	Impedance	50 Ohms
8	Power Handling	20W max
9	Connectors	SMA-Female
10	Surface Finish	Black Painted
11	Temperature Range	-30℃ ~ +70℃

Dimensions(mm)

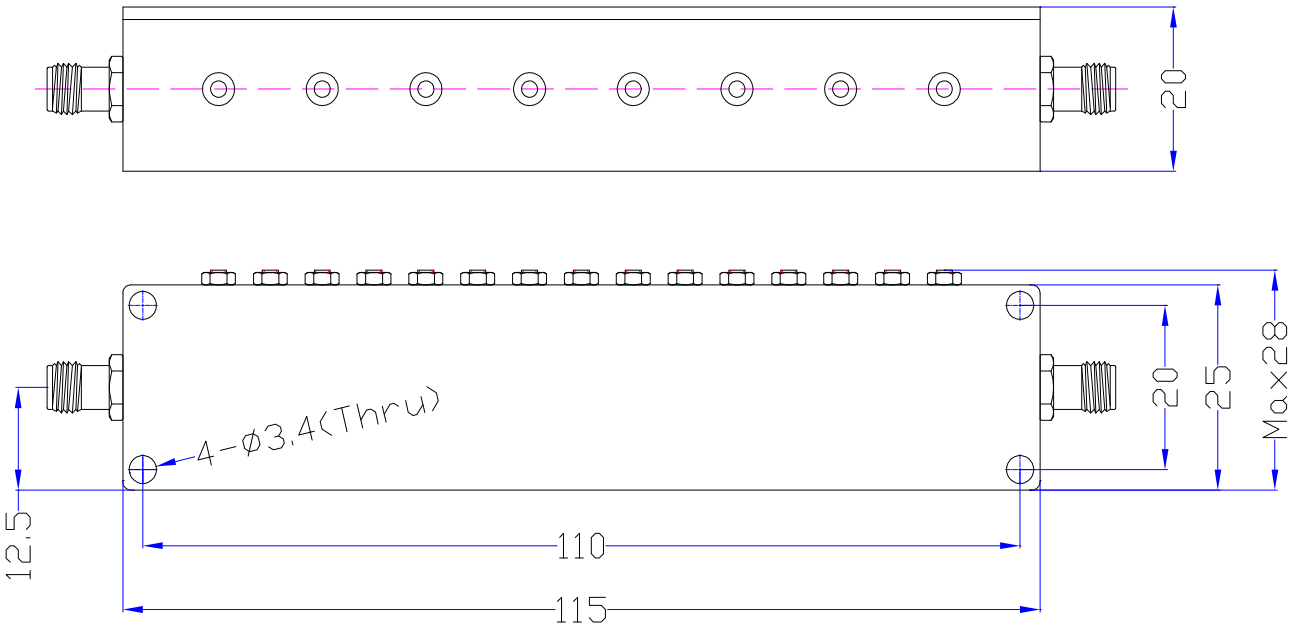



3.4-3.8 GHz Band Pass Filter SRFS-BPF-3600MS1

Typical Test Data

