400 -470 MHz Band Stop Filter


SRFS-BSF-435MS1



Specifications

1	Pass Band Frequency	DC-350&520-2500MHz
2	Stop Band Frequency	400-470MHz
3	Pass Band Insertion Loss	≤3.0dB
4	Return Loss	≥8 dB
5	Stop Band Attenuation	≥40dB @ 400-470MHz
6	Impedance	50 ohms
7	Power	≤50W
8	Connectors	SMA-Female
9	Surface Finish	Black Paint
10	Temperature Range	0℃ ~ +55℃

Dimensions (Unit: mm)

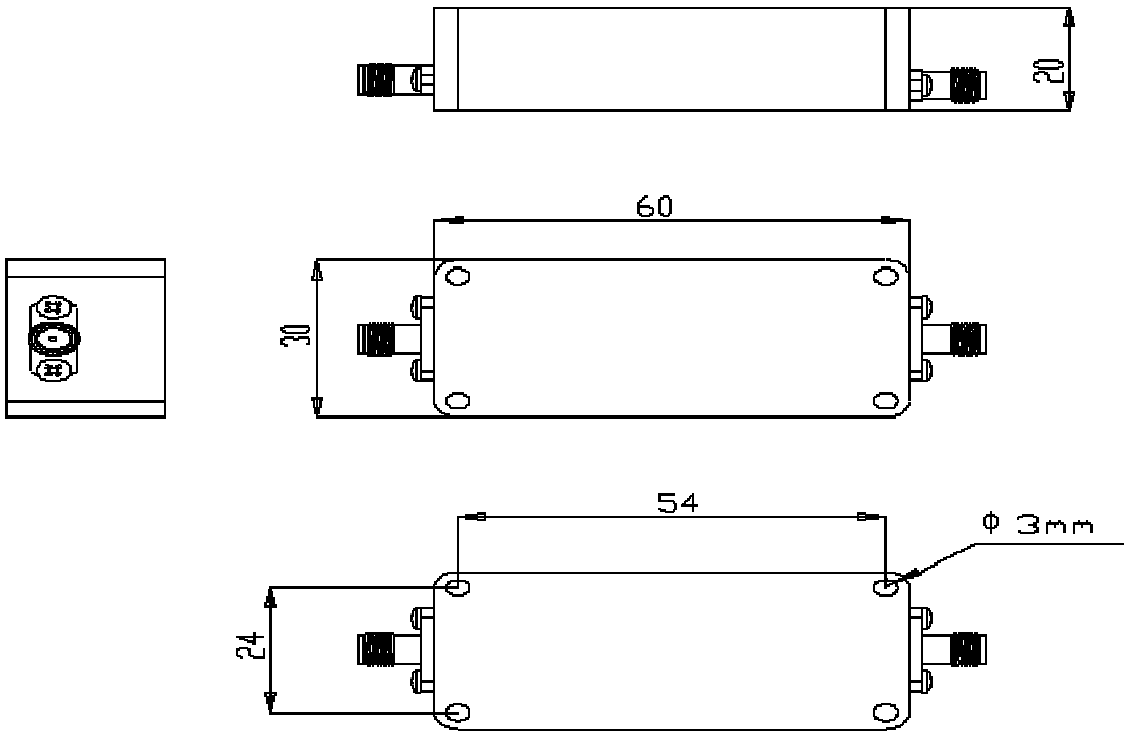



400 -470 MHz Band Stop Filter SRFS-BSF-435MS1

Typical Test Data

