


698-3800MHz N Female -160dbc 4x4 Hybrid Combiner

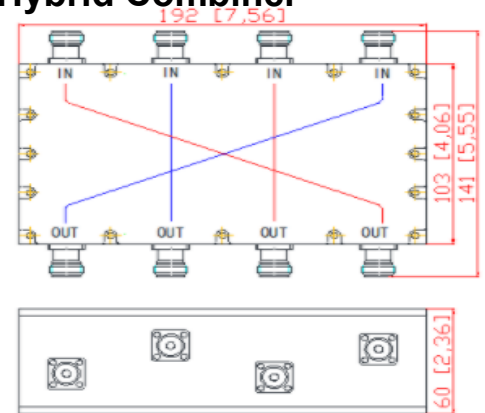

Product Description:

698-3800MHz N Female -160dbc 4x4 Hybrid Combiner

698-3800MHz N Female Low PIM 4 In 4 Out 4x4 Hybrid Coupler Combiner For DAS IBS

The hybrid combiner is used to split and combiner RF signals. It is related to the 3 dB hybrid which is based on PCB transmission lines or dielectric 3db hybrid , and is most commonly used as combiner in distributed antenna system(DAS).

Mechanical & Electrical Specifications	
Part Number	SRFS-HC4x4-0738-ON
Operating Frequency (MHz)	698-3800
Impedance (Ohm)	50
VSWR	≤1.3
Insertion Loss (dB)	6.2±1
Isolation (dB)	≥20
IM3 (dBc @ 2×43dBm)	-160
Application	Indoor & Outdoor
Degree of Protection	IP65
Operating Temperature (°C)	-40 ~ + 80
Interface	N Female
Handling Power (Watt, max)	300
Peak Power (Watt, max)	1200
Dimension (mm)(L×W×H, excl connector)	192 × 103 × 60
Net Weight (g)	1945 ± 20
Packing Dimensions (mm,L×W×H)	210 × 170 × 65
Packing Carton Size (mm,L×W×H)	530 × 440 × 80
ROHS Compliance	Yes

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059


+91-9027232570, +91-8800726650 ✉ info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in

SRFS TELEINFRA



698-3800MHz N Female -160dbc 4x4 Hybrid Combiner

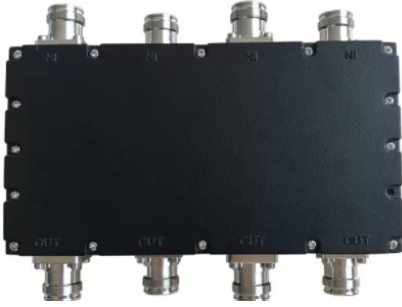

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 ✉ info@srfsteleinfra.in, info@srfsteleinfra.com

🌐 www.srfsteleinfra.in
